

08/28/00

J0772 U.S. PTO

+

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

2369.12202

First Named Inventor or Application Identifier

TOSHIYUKI SUDO, ET AL.

Express Mail Label No.

J0836 U.S. PTO

09/648768

08/28/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages **91**3. ☒ Drawing(s) (35 USC 113) Total Sheets **26**4. ☐ Patent Application Bibliographic
Data Sheet Total Sheets 5. ☒ Oath or Declaration Total Pages **2**a. ☒ Newly executed (original or copy)b. ☐ Unexecuted for information purposesc. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
[Note Box 6 below]i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).6. ☐ Incorporation By Reference (useable if Box 5c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 5c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein. The incorporation can only be
relied upon when a portion has been inadvertently omitted from the
submitted application parts.7. ☐ Microfiche Computer Program (Appendix)8. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies**ACCOMPANYING APPLICATION PARTS**9. ☒ Assignment Papers (cover sheet & document(s))10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)11. ☐ English Translation Document (if applicable)12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations13. ☒ Preliminary Amendment14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)15. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired16. ☒ Certified Copy of Priority Document(s)
(if foreign priority is claimed)17. ☐ Other: _____

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/_____
Prior application information: Examiner _____ Group/Art Unit: _____**19. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label **05514** or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	87-20 =	67	X \$ 18.00 =	\$1,206.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	9-3 =	6	X \$ 78.00 =	\$ 468.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$690.00
	Total of above Calculations =				\$2,624.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$2,624.00

20. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


21. ☒ A check in the amount of \$ 2,624.00 to cover the filing fee is enclosed.

22. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

23. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Brian L. Klock, Registration No. 36,570
SIGNATURE	
DATE	August 28, 2000

BLK/fdb

2369.12202

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
: Examiner: Unknown
TOSHIYUKI SUDO, et al.)
: Group Art Unit: Unknown
Appln. No.: Unassigned)
:
Filed: Concurrently Herewith)
:
For: IMAGE INPUT APPARATUS) August 28, 2000
AND IMAGE DISPLAY)
APPARATUS)

The Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Prior to examination on the merits, please amend the
above-identified application as follows:

IN THE CLAIMS:

Please amend Claim 23 as follows:

Claim 23

Line 3, change "19 or 20." to -19.-.

003230" B92B4960

Please add Claim 48 as follows:

-48. A stereoscopic display system comprising the image display apparatus of Claim 1, 2, or 11, and the image input apparatus of Claim 20.-.

REMARKS

Applicant requests favorable consideration and allowance of this application.

Claim 23 has been amended and Claim 48 has been added to more clearly define the claimed subject matter.

An early Notice of Allowance is solicited.

Applicant's undersigned attorney may be reached in our Washington, D.C. office by telephone at (202) 530-1010. All correspondence should continue to be directed to our below-listed address.

Respectfully submitted,



Attorney for Applicant
Registration No. 36,570

FITZPATRICK, CELLA, HARPER & SCINTO
277 Park Avenue
New York, New York 10172
Facsimile: (212) 758-2982

BLK/fdb

IMAGE INPUT APPARATUS AND IMAGE DISPLAY APPARATUS

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to image input
apparatus and image display apparatus for recording and
reproducing three-dimensional imagery (parallax images)
and, more particularly, to those permitting an observer
to observe an image displayed on an image display
10 means, in a natural condition without feeling fatigued
and in a good image state.

Related Background Art

 A variety of attempts have been conducted
heretofore to substantiate methods of recording image
15 information of stereoscopic objects (three-dimensional
objects) in an image recording means and
stereoscopically reproducing the image information
recorded in the image recording means.

 Commonly used among them are methods of presenting
20 stereoscopic vision to the observer by use of binocular
parallax (methods with polarizing glasses, lenticular
methods, etc.).

 Since these methods give rise to a contradiction
between the accommodation and the vergence of the
25 observer's eyes, the observer often feels fatigued or
uncomfortable.

 There thus have been some attempts made to develop

09548758.082800

5 Among them, according to Chapter III, Paragraph
VIII "Studies on stereoscopic vision of super-multiview
regions" in "Final outcome reports of advanced
stereoscopic dynamic picture communication project"
issued by Tsushin-Hoso Kiko (Communication-Broadcasting
10 Organization) in 1997, under the stereoscopic display
of "super-multiview regions" in which view points are
sampled at frequencies higher than the spatial
frequencies of observer's pupils and in which
continuous parallax stereograms are reproduced in
15 fashion similar to actually existing objects, a
plurality of parallax images are incident to a single
eye of the observer and this presents the effect of
guiding the focal accommodation of the observer's eyes
to the converging point of observer's eyes so as to
20 relieve the fatigue or uncomfortable feeling of the
observer.

Namely, the above reports present the view that stereoscopy is implemented with less fatigue of the eyes thanks to the "monocular parallax effect" when the stereoscopic display method of presenting parallax images from two view points to the both eyes, employed heretofore, is extended to a method of presenting

5 Further, Chapter III, Paragraph VI "Research and development of multiocular stereoscopic displays by focused light array (FLA)" in the above reports presents a specific example for carrying out the above theory.

FLA is an array of beams obtained by shaping light from light sources, such as semiconductor lasers, into fine beams by optical systems (beam shaping optics) as illustrated in Fig. 23A and focusing an arcuate array of beams all into the center of a circle as illustrated in Fig. 23B.

20 The focal point thus formed is re-imaged on a
vertical diffuser by an optical system (an objective
lens and an imaging lens) and is two-dimensionally
scanned at high speed by a scanning system (a vertical
scanner and a horizontal scanner) to form a two-
25 dimensional image. If cycles of the scanning are
within the after image tolerance time of the observer's
eyes (i.e., within about 1/50 second), the image can be

observed without a flicker.

The focal point at a certain moment constitutes individual pixels of the two-dimensional image and the pixels can be considered to be bright points emitting rays in different directions in the number equal to the number of original light sources.

In what directions the rays are to be emitted can be determined by selection of light sources to be lighted. Since the emission directions of rays differ by only a very small angle, the condition is that two or more different rays are incident to the observer's pupil at the observation position.

Namely, the above structure realizes the stereoscopic display of "super-multiview regions" in which a plurality of parallax images are incident to the single eye of observer, whereby the focus accommodation of the observer's eyes is guided to near the stereoscopic image, thereby relieving the fatigue or uncomfortable feeling of the observer.

The prior art involves the following problems. Since the very fine parallax images need to be presented to the observer in the case of the stereoscopic display of "super-multiview regions," it raises the necessity of handling extremely enormous volumes of image information. In addition, since all the parallax images must be displayed within the after image tolerance time of the observer's eyes, a very

fast information display means is essential.

According to the above-stated document, the intervals of the parallax images are 0.5° and thus forty five parallax images are reproduced for the observation area of 22.5° in the horizontal direction.

For this reason, the image information processing and quick image display must be forty five times those of the ordinary two-dimensional image display apparatus.

The prior art example employs the combination of the scanning system with the semiconductor lasers in order to satisfy such quick drawing performance, but they are not ordinary means for the image information display means and are practically unpreferred because of increase in the scale of apparatus and in production cost and speciality of image processing.

SUMMARY OF THE INVENTION

An object of the present invention is to provide image input apparatus and image display apparatus that facilitate recording and display of a stereoscopic image and that permits the observer to observe the stereoscopic image in a good state without feeling fatigued.

An image display apparatus according to one aspect of the present invention is an image display apparatus comprising image display means for displaying a

002250 " 89234360

parallax image, a display optical system for guiding light from the image display means to a position of an exit pupil, exit pupil control means for spatially and temporally dividing the exit pupil into a plurality of areas and controlling a passing beam to each area, and image switching control means for controlling switching between parallax images of the image display means in correspondence to passing beams through the respective areas of the exit pupil, wherein a plurality of parallax images are perceived by a single eye of an observer.

An image display apparatus according to another aspect of the present invention is an image display apparatus comprising image display means for displaying a parallax image, a display optical system for guiding light from the image display means to a position of an exit pupil, and exit pupil control means for controlling a position or a size of the exit pupil in a direction perpendicular to the optical axis, dividing the exit pupil into a plurality of areas, and successively generating the plurality of divided areas of the exit pupil without duplication, wherein the image display means successively displays corresponding parallax images according to beams passing the respective areas thus generated.

An image display apparatus according to another aspect of the present invention is an image display

005237 824960

apparatus comprising image display means for displaying
a parallax image, a display optical system for guiding
light from the image display means to a dividing
aperture, the dividing aperture having a plurality of
5 apertures, wherein an arbitrary aperture out of the
plurality of apertures is selected as a passing area of
light, and control means for controlling a position of
the light-passing aperture in the dividing aperture and
the parallax image displayed on the image display
10 means.

In a further aspect of the present invention, the
exit pupil or dividing aperture has a diameter two to
five times larger than a diameter of the pupil of the
observer using the image display apparatus.

15 In a further aspect of the present invention, any
one of the plurality of areas in the exit pupil or
dividing aperture has a size not more than half a size
of the pupil of the observer using the image display
apparatus.

20 In a further aspect of the present invention, the
image display apparatus is mounted on the head of the
observer, and the exit pupil is fixed at the position
of the pupil of the observer.

In a further aspect of the present invention, the
25 exit pupil or dividing aperture is divided into a
plurality of areas only in the horizontal direction.

In a further aspect of the present invention, the

003220-8927360

image display means comprises a transmissive spatial light modulator and the exit pupil control means or dividing aperture comprises a self-emissive spatial light modulator.

5 In a further aspect of the present invention, the image display means comprises a self-emissive spatial light modulator and the exit pupil control means or dividing aperture comprises a transmissive spatial light modulator.

10 In a further aspect of the present invention, each of the image display means and either the exit pupil control means or dividing aperture comprises a transmissive spatial light modulator.

15 In a further aspect of the present invention, the exit pupil control means comprises a micro-mirror device.

20 An image input apparatus according to one aspect of the present invention is an image input apparatus comprising imaging means for imaging an object, an imaging optical system for guiding light from the object to the imaging means, aperture generating means for spatially and temporally dividing a pupil of the imaging optical system into a plurality of areas and controlling a passing beam to each area, and control
25 means for controlling switching between parallax images taken by the imaging means in correspondence to the respective areas of the pupil so as to effect input of

008280" 89234950

the parallax images.

An image input apparatus according to another aspect of the present invention is an image input apparatus comprising imaging means for imaging object information, an imaging optical system for guiding light from an object to the imaging means, aperture generating means for controlling a position or a size of a pupil of the imaging optical system, dividing the pupil into a plurality of areas, and limiting a beam-passing area, and control means for making the imaging means successively take corresponding parallax images according to positions of the aperture of the pupil.

In a further aspect of the present invention, the pupil is divided into a plurality of areas only in the horizontal direction.

In a further aspect of the present invention, the aperture generating means comprises a transmissive spatial light modulator.

A stereoscopic display apparatus according to one aspect of the present invention comprises the above-stated image display apparatus and the above-stated image input apparatus.

A stereoscopic display system according to another aspect of the present invention is a stereoscopic display system comprising imaging means for imaging an object, an imaging optical system for guiding light from the object to the imaging means, aperture

003230" 89737960

5 parallax images taken by the imaging means in
correspondence to the respective areas of the pupil so
as to effect input of the parallax images, image
display means for displaying a parallax image, a
display optical system for guiding light from the image
0 display means to a position of an exit pupil, exit
pupil control means for spatially and temporally
dividing the exit pupil into a plurality of areas and
controlling a passing beam to each area, and image
switching control means for controlling switching of
5 the parallax images taken by the imaging means, to the
parallax images on the image display means in
correspondence to passing beams through the respective
areas, wherein a plurality of parallax images are
perceived by a single eye of an observer.

25 An image display apparatus according to another aspect of the present invention is an image display apparatus wherein an optical system comprising image information generating means for displaying a parallax

5

10

the pupil in front of the pupil of the observer.

15

direction and in the vertical direction.

20

25

In a further aspect of the present invention, the

An image display apparatus according to another aspect of the present invention is an image display apparatus comprising image display means capable of displaying image information with parallax, illumination means having an illumination light source for illuminating the image display means, and a display optical system for guiding light from the image display means to an observing eye, in which the illumination light source is located at or near a position optically equivalent to an entrance pupil of the display optical system and in which the image information is observed while a position of an exit pupil of the display optical system is approximately matched with a position of an entrance pupil of the observing eye, wherein the illumination light source comprises a plurality of unit light sources, wherein images of the unit light sources spatially divide the exit pupil of the display optical system into a plurality of illumination areas, and wherein a plurality of parallax images are made incident in time series into a single eye of an observer by making use of control means for time-divisionally controlling radiation of light from the plurality of unit light sources so as to control time division of the exit pupil of the display optical

system into the plurality of illumination areas and for
controlling switching between image information
displayed on the image display means in correspondence
to circumstances of incidence of light to the
5 respective illumination areas.

An image display apparatus according to another
aspect of the present invention is an image display
apparatus comprising a plurality of image display means
capable of displaying image information with parallax,
10 at least one illumination means having an illumination
light source for illuminating the plurality of image
display means, and a display optical system for guiding
light from the plurality of image display means to an
observing eye, in which the illumination light source
15 is located at or near a position optically equivalent
to an entrance pupil of the display optical system and
in which a position of an exit pupil of the display
optical system is approximately matched with a position
of an entrance pupil of the observing eye so as to
20 permit observation of the image information, wherein
the illumination light source comprises a plurality of
unit light sources, wherein images of the unit light
sources spatially divide the exit pupil of the display
optical system into a plurality of illumination areas,
25 and wherein a plurality of parallax images are made
incident simultaneously or time-serially into a single
eye of an observer by making use of control means for

0022280" 89284360

In a further aspect of the present invention, the

illumination means, the control means time-divisionally controls radiation of light from the plurality of unit light sources in the illumination light source of each illumination means, thereby time-divisionally
10 controlling incidence of light to the plurality of illumination areas in the exit pupil of the display optical system, and the control means controls switching between parallax images displayed on the plurality of image display means in correspondence to
15 incidence of light to the plurality of illumination areas.

In a further aspect of the present invention, the plurality of unit light sources of the illumination light source are comprised of a light emitter array.

plurality of unit light sources of the illumination
25 light source are comprised of a surface illuminant and
a transmissive spatial light modulator.

In a further aspect of the present invention, the

plurality of unit light sources of the illumination light source are comprised of a surface illuminant and a reflective spatial light modulator.

5 In a further aspect of the present invention, the image display means comprises a transmissive spatial light modulator.

In a further aspect of the present invention, the image display means comprises a reflective spatial light modulator.

10 In a further aspect of the present invention, the display optical system has a prism body comprising a decentered, rotationally asymmetric, reflecting surface with optical powers differing depending upon azimuthal angles.

15 An image observation system according to another aspect of the present invention is a system wherein a pair of above-stated image observation apparatus are provided for the left and right eyes of the observer.

20 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an explanatory diagram to illustrate the basic concept of the image display apparatus of the present invention;

25 Fig. 2 is a perspective view to illustrate the basic concept of the image display apparatus of the present invention;

Fig. 3 is a schematic diagram of an application

003220" 29294960

Fig. 13 is a schematic diagram to show the main part of Embodiment 1 of the image display apparatus of the present invention;

Fig. 15 is a schematic diagram to show the main
10 part of Embodiment 1 of the image input apparatus of
the present invention;

15 Fig. 17 is a schematic diagram to show the main
part of Embodiment 2 of the image display apparatus of
the present invention;

Fig. 19 is a schematic diagram to show the main part of Embodiment 4 of the image display apparatus of the present invention;

Fig. 21 is an explanatory diagram to illustrate a

device to which the image display apparatus of the present invention can be applied;

Fig. 22 is a schematic diagram to show the main part of the conventional image display apparatus;

5 Fig. 23A and Fig. 23B are schematic diagrams to show the main part of the conventional image display apparatus;

10 Fig. 24 is an explanatory diagram to illustrate the stereoscopic display by the super-multiview regions;

Fig. 25 is a schematic diagram to show the main part of Embodiment 5 of the present invention;

Fig. 26 is a perspective view of Fig. 25;

15 Fig. 27 is an explanatory diagram to illustrate the display method of the image display apparatus of the present invention;

Fig. 28 is an explanatory diagram to illustrate the display method of the image display apparatus of the present invention;

20 Fig. 29 is an explanatory diagram to illustrate the display method of the image display apparatus of the present invention;

25 Fig. 30 is an explanatory diagram to illustrate the display timing of the image display apparatus of the present invention;

Fig. 31 is an explanatory diagram to illustrate the stereoscopic vision by the image display apparatus

003283" 83/87960

Fig. 32 is an appearance view of the image display apparatus of Embodiment 5 of the present invention;

Fig. 33 is a block diagram to explain the

Fig. 34 is an explanatory diagram to illustrate a way of dividing the pupil in Embodiment 6 of the present invention;

Fig. 35 is an explanatory diagram to illustrate another way of dividing the pupil in Embodiment 6 of the present invention;

Fig. 36 is an appearance view of the image display apparatus of Embodiment 6 of the present invention;

Fig. 37 is a block diagram to explain the

Fig. 38 is an explanatory diagram to illustrate the basic concept of the optical system in the image observation apparatus of the present invention;

Fig. 39 is an explanatory diagram to illustrate the basic concept of the optical system in the image observation apparatus of the present invention;

Fig. 40 is an explanatory diagram to illustrate the basic concept of the optical system in the image observation apparatus of the present invention;

Fig. 41 is an explanatory diagram to illustrate the basic concept of the optical system in the image observation apparatus of the present invention;

Fig. 42 is a schematic diagram to show the main part of Embodiment 7 of the present invention;

Fig. 43 is a schematic diagram to show the main part of a modification obtained by modifying part of Embodiment 7 of the present invention;

Fig. 44 is a schematic diagram to show the main part of Embodiment 8 of the present invention;

Fig. 45 is a schematic diagram to show the main part of a modification obtained by modifying part of Embodiment 8 of the present invention;

Fig. 46 is a schematic diagram to show the main part of the illumination means according to the present invention;

Figs. 47A, 47B, 47C and 47D are schematic diagrams to show the main part of the illumination means according to the present invention;

Fig. 48 is a schematic diagram to show the main part of Embodiment 9 of the present invention;

Fig. 49 is a schematic diagram to show the main part of a modification obtained by modifying part of Embodiment 9 of the present invention;

Fig. 50 is a schematic diagram to show the main part of Embodiment 10 of the present invention;

Fig. 51 is a schematic diagram to show the main part of Embodiment 10 of the present invention; and

Fig. 52 is a schematic diagram to show the main part of Embodiment 10 of the present invention.

003230" 39434360

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 is an explanatory diagram (plan view) to illustrate the basic concept of the image display apparatus according to the present invention. In Fig. 1 numeral 2 designates an optical system, which has a display optical system 8, an image information generating means (image display means) 5, and an exit pupil control means 6.

Numeral 1 denotes a virtual image of image information (parallax images) generated by the image information generating means 5.

Numeral 3 represents the exit pupil formed by the optical system 2 and the optical system 2 is designed to match this exit pupil 3 with the pupil position of the observer's eye 4. The observer's eye 4 observes the whole of the image information 1 through this exit pupil 3.

Fig. 2 is a perspective view to show an obliquely observed state of the structure of Fig. 1. Fig. 2 shows the exit pupil 3 divided in the matrix of four horizontal \times three vertical areas.

In the present embodiment the image display device of the structure described above is placed for each of the observer's left and right eyes and the devices themselves are mounted on the observer's head through a belt so as to fix the relation between the devices and the observer's pupils as illustrated in Fig. 3.

The image information generating means 5 of the left and right image display devices generate the image information in synchronism with each other. The binocular parallax images may be displayed independently of each other as the left and right image information, whereby the observer can observe a stereoscopic image.

In the present embodiment the exit pupil 3 is divided into a plurality of areas and the exit pupil control means 6 works to quickly switch the areas to control through which area in the exit pupil 3 the image information 1 displayed on the image display means 5 is presented to the observer's eye 4.

At this time, a control means 100 controls the image information displayed on the image display means 5 in correspondence to the above switching the areas of the exit pupil 3.

Fig. 4 to Fig. 7 are explanatory diagrams to illustrate this operation in the present embodiment. In Fig. 4 the exit pupil control means 6 forms the exit pupil 3-1. At this time the image information generating means 5 selects and displays the image information (parallax image) 1-1 as a corresponding image.

After a lapse of an infinitesimal time, the exit pupil control means 6 forms the exit pupil 3-2 as illustrated in Fig. 5. At this time the image

Similarly, the image information generating means 5 switches to display the image information 1-3 correspond to formation of the exit pupil 3-3 (Fig. 6) and the image information 1-4 correspond to formation of the exit pupil 3-4 (Fig. 7).

In this way, the positions of the aperture areas of the exit pupil 3 are in one-to-one correspondence to kinds of the image information displayed on the image display means 5. Since this switching operation is repeated in cycles shorter than the after image tolerance time of persistence of vision of the observer's eye, it can never be perceived by the observer.

The device of the present embodiment permits the stereoscopic display of "super-multiview regions" by which the single eye of the observer can recognize a plurality of parallax images. For implementing such stereoscopic display, the parallax images according to

In this case, the parallax images to be displayed are obtained as a series of parallax images obtained when the object 7 is observed from view points at center positions 3-1' to 3-4' of the respective areas 3-1 to 3-4 of the above exit pupil, as illustrated in Fig. 9.

15 The dividing number of the areas of the exit pupil
3 can be determined as occasion may demand. In cases
wherein the display of image information and the
formation of the exit pupil can be performed at
extremely high speed, it is preferable to employ the
20 greater dividing number of the areas of the exit pupil
and thus increase the number of parallax images
recognized in the single eye in the stereoscopic
display of "super-multiview regions", so as to make the
reproduced stereoscopic image look more natural.

25 For example, in the case of the dividing method
into three vertical and four horizontal areas as
illustrated in Fig. 10, twelve parallax images can be

presented into the single eye, so as to implement reproduction of a natural stereoscopic image.

However, since the display time of each parallax image information becomes shorter with increase in the dividing number, greater numbers tend to pose the problem of insufficiency of drawing performance and image information processing performance of the image information generating means 5 and control performance of the exit pupil control means 6.

The above example requires the image drawing performance and image information processing performance at least twelve times higher than those of the ordinary two-dimensional image display means.

In the present embodiment, therefore, the dividing number of the exit pupil is set as small as possible. Since in the stereoscopic vision the effect of horizontal parallax is greater than that of vertical parallax, the exit pupil 3 is divided into a plurality of areas in the horizontal direction as illustrated in Fig. 11.

This reduces the number of parallax images to be displayed, to four, whereby the volume of image information can be reduced considerably as compared with the cases including the vertical parallax. Therefore, the image drawing performance and the image information processing performance required for the image information generating means 5 can be

approximately four times those for the ordinary two-dimensional image display.

The exit pupil 3 and each area of the divided exit pupil do not always have to be so rectangular as
5 illustrated, but may be circular, elliptic, or polygonal.

In the case of the image display apparatus of the head-mounted type, it is common practice to set the exit pupil a little larger than the pupil diameter in
10 order to be ready for deviation of mount position and for ocular movement.

In the present embodiment the exit pupil is set slightly larger than the pupil diameter, whereby the observer can observe the whole of the image information
15 1 even with fine deviation of the observer's pupil position.

As described above, the present embodiment realizes the stereoscopic display of "super-multiview regions" by the smaller number of parallax images than
20 before.

For example, in the case wherein the image-observable range of image information 1 is W ($^{\circ}$) about the screen center 1a and the display intervals of the parallax images are Δ ($^{\circ}$) as illustrated in Fig. 24,
25 the number of parallax images is W/Δ . Since a plurality of parallax images have to be presented into the single eye for implementing the stereoscopic

For example, let us suppose that the observation distance from the image information 1 to the observer is 500 mm, the pupil diameter of the observer is 4 mm, and the observation area $W = 30^\circ$. Then the angular intervals Δ need to be not more than 0.23° and the number of parallax images not less than 130. Since these parallax images all have to be displayed within the tolerance time of persistence of vision of the observer's eye, it is essential to use an extremely fast information display means.

In contrast with it, according to the present embodiment, the exit pupil is fixed at the position of the observer's pupil, so that the number of parallax images to be presented is decreased drastically.

In the present embodiment the pupil diameter is

set in the size slightly greater than the observer's pupil in order to be ready for the mount deviation and for the ocular movement as described above, and the size of the exit pupil is set to be two to five times greater than the size of the observer's pupil in order to maintain the effects of the invention as described above.

(Embodiment 1)

A specific embodiment of the present invention will be presented next. Fig. 12 is a plan view of Embodiment 1 of the present invention. Although the devices are mounted for the both eyes, the figure shows only the device for one eye. In Fig. 12, numeral 8 designates a convex lens (display optical system), 9 a transmissive image display means, and 10 a divided illumination means (exit pupil control means). It is noted that the convex lens 8 does not always have to be a single lens but can be composed of a plurality of lenses.

The image display means 9 is, for example, a liquid crystal display or the like. The divided illumination means 10 is comprised of a surface illuminant divided into four areas, areas 10-1 to 10-4, which is, for example, an EL element or an LED light source provided with a diffuser.

The image information (parallax images) is expressed as a spatial light transmittance distribution

on the image display means 9 and the divided illumination means 10 illuminates it from the back to visualize the image.

Since the image display means 9 and the convex lens 8 are separated by the focal length f of the convex lens 8, the image displayed on the image display means 9 is enlarged to form a virtual image 9' at infinity.

The image position of the virtual image 9' does not have to be limited to the infinity, but may be determined at any position by adjusting the distance between the image display means 9 and the convex lens 8.

On the other hand, the divided illumination means 10 is imaged at the position (pupil position) 3 in the figure by the convex lens 8. Since the divided illumination means 10 is a light source for the image display means 9, the position 3 is the substantial exit pupil of this optical system.

This exit pupil 3 is designed to match approximately with the pupil position of the observer's eye 4. Therefore, the observer observes the whole of the virtual image 9' through the exit pupil 3. The divided illumination means 10 is constructed of the surface illuminant divided into four areas in the horizontal direction as the one illustrated in Fig. 11, and the control means 100 controls which area is to be

002230" 39234360

lighted at what timing.

As described previously, since the divided illumination means 10 and the exit pupil 3 are in the conjugate relation, selection of area on the divided illumination means 10 is reflected to the side of the exit pupil 3.

For example, when the area 10-1 is selected as a light source as illustrated in Fig. 12, the image information light emerges from only the area 3-1 out of the areas of the exit pupil 3. When the area 10-2 is selected as a light source as illustrated in Fig. 13, the image information light emerges from only the area 3-2 out of those of the exit pupil 3.

When each of the areas of the divided illumination means 10 lights up independently in this manner, the exit pupil 3 is also divided into four areas and each area exists independently.

In the present embodiment these areas of the divided surface illuminant 10 are quickly switched to light successively by the control means 100. At this time the images to be displayed on the image display means 9 are switched at high speed to be displayed in synchronism with the switching of the surface illuminant 10. The display of image and the timing of illumination are controlled by the display and illumination control means 100.

This operation creates such a situation that the

003230" 39284960

four types of different parallax images displayed on the image display means 9 are observed successively through the four different areas of the exit pupil. The selection of the displayed images and the areas of the exit pupil is carried out by use of the combination as illustrated in Fig. 8 according to the concept of the present invention discussed previously.

The images 1-1 to 1-4 at this time are the parallax images corresponding to the exit pupil positions 3-1 to 3-4 as illustrated in Fig. 9.

Accordingly, the present embodiment permits four single-eye parallaxes in the horizontal direction to be presented to the observer, and this is carried out for the two eyes so as to permit the natural three-dimensional image display without causing fatigue of the eyes.

The switching frequency of display and illumination is set higher than the after image tolerance frequency of the human eyes. For that reason, the observer will never observe a flicker in the observation of image.

Next, an example of the image pickup apparatus (image input apparatus) for obtaining the above parallax images in the present embodiment is shown in Fig. 14 and Fig. 15.

In Fig. 14, the image pickup apparatus (image input apparatus) 13 is composed of the following

An aperture generating means 15 is placed at the optical pupil position of the taking lens 14. The aperture generating means 15 is comprised of a transmissive, spatial light modulator such as a liquid crystal display or the like, which generates a light transmittance distribution to form optical aperture and shield portions. The aperture generating means 15 and image pickup device 17 both are controlled by control means 16.

The aperture positions 3-1" to 3-4" correspond to the exit pupil areas 3-1 to 3-4 (Fig. 12, Fig. 13) in the reproduction of image, and the images picked up through the respective apertures are small parallax images suitable for the stereoscopic reproduction of "super-multiview regions."

25 For example, the image (parallax image) picked up
through the aperture 3-1" as illustrated in Fig. 14
corresponds to the parallax image 1-1 in Fig. 4, and

the image picked up through the aperture 3-2" as illustrated in Fig. 15 to the parallax image 1-2 in Fig. 5.

5 The parallax images 1-3, 1-4 can also be gained by forming the apertures 3-3", 3-4" in similar fashion.

10 The small parallax images thus obtained are sent together with signals to define the correspondence to the opening positions upon the image pickup to image transmission part or recording part (not illustrated), to be transmitted or recorded for the stereoscopic display apparatus of "super-multiview regions."

15 The actually taken data for the stereoscopic display apparatus of "super-multiview regions" is gained by use of the image pickup apparatus as described above. This data may also be gained on a virtual basis by computation with a computer as described previously. In this case, the parallax images from the plurality of view points can be calculated by the computer according to the concept of Fig. 9.

(Embodiment 2)

25 Fig. 16 is a plan view of Embodiment 2 of the image display apparatus according to the present invention. The present embodiment is different from Embodiment 1 of Fig. 12 in that a second convex lens 8' is provided in the optical system.

The convex lens 8' functions to guide the

003230" 83284960

illumination light from the divided illumination means
10 approximately normally to the transmissive image
display means 9.

5 This permits the image information to be expressed
without variations in luminance throughout the entire
screen even in cases wherein the transmissive image
display device with field angle characteristics of the
liquid crystal or the like is used as the image display
means.

10 For the same purpose, a condenser lens 11 may be
disposed near the image display means 9 as illustrated
in Fig. 17.
(Embodiment 3)

15 Fig. 18 is a plan view of Embodiment 3 of the
present invention. In the present embodiment the image
formed on the image display means 9 is imaged as an
image 1' in air by a second convex lens 8". The image
position of the image 1' is coincident with the
position of the image display means 9 in Embodiment 1.
20 This causes the image 1' to be formed as an enlarged
virtual image by the first convex lens 8.

A transmissive divided aperture 12 is disposed at
the position of the divided illumination means 10 in
Embodiment 1. Since the position of an aperture in the
25 divided aperture 12 is controlled in a manner similar
to the selection of the light source 10 in Embodiment
1, change of the aperture position in the divided

002280" 89484950

aperture 12 is reflected to the divided exit pupil position in the exit pupil 3.

Therefore, the present embodiment can implement the image display entirely similar to that in Embodiment 1. In the present embodiment, the image display means 9 does not always have to be a transmissive image display means, which increases degrees of freedom for selection of the image display means.

Particularly, since the reflective, self-emissive image display devices are often normally faster as to the image drawing speed than the transmissive image display devices, the present embodiment is more advantageous in certain cases of practical use.

(Embodiment 4)

Fig. 19 is a plan of Embodiment 4 of the present invention. Embodiment 3 described above employs the transmissive divided aperture 12 for dividing the exit pupil, whereas the present embodiment employs such a configuration that the divided aperture 12 is disposed directly near the position of the exit pupil 3.

The control means 101 controls the position of an aperture in the divided aperture, i.e., the position of the exit pupil in synchronism with control of the image displayed on the image display means 9. This realizes the effect similar to that in the other embodiments.

The present embodiment considerably simplifies the

003280" 89284850

structure of the apparatus as illustrated.

There exist a lot of devices as embodiments of the present invention as described above, and the present invention can be applied to any other apparatus having the exit pupil in the size approximately equal to the observer's pupil and using the control means capable of simultaneously carrying out the exit pupil control means for dividing the exit pupil into plural areas and successively switching between the areas and the image information generating means for successively switching between presented images in synchronism therewith.

For example, Japanese Patent Application Laid-Open No. H07-239450 discloses the device illustrated in Fig. 20. In Fig. 20 the stereoscopic image display device disclosed is provided with a micro-mirror device having a plurality of microscopic mirrors placed in a matrix pattern on a substrate, a spatial light modulation element for spatially modulating illumination light, which is arranged so that the illumination light thus modulated is incident to each of the mirrors of the micro-mirror device, image input means for inputting a plurality of parallax images, and means for displaying a predetermined parallax image on the spatial light modulation element, based on the parallax images inputted by the image input means, and for controlling a direction of each mirror of the micro-mirror device to an angle of reflection of reflected light toward the

parallax image, and an image display device permitting the stereoscopic vision of "super-multiview regions" can be constructed by using this display device as the image display means and the exit pupil position control means of the present invention.

For example, as illustrated in Fig. 21, the image displayed on the image display device is imaged on the micro-mirror device through a lens or the like and it is used as the image information 1 presented to the observer. By well controlling angles of the individual mirrors of the micro-mirror device, adjustment can be made so that the light to form the image information 1 can emerge from the exit pupil 3 near the pupil of the observer 4 as illustrated.

The position of the exit pupil 3 can be moved as in Figs. 4 to 7, by varying the angles of the mirrors, and the stereoscopic display of "super-multiview regions" as the objective of the present invention can be implemented by carrying out the appropriate parallax image display on the image display device in synchronism with the movement of the pupil position.

The present invention thus permits the attainment of the image input apparatus and image display apparatus capable of readily performing the recording and display of stereoscopic image and permitting the observer to observe the stereoscopic image in a good state without feeling fatigued.

Fig. 25 is an explanatory diagram (plan view) to illustrate the fundamental concept of the image display apparatus according to a further embodiment of the present invention. In Fig. 25 numeral 2 designates an optical system, which has an image display generating means (image information generating means) 5 and a lens (display optical system) 26 composed of a single lens or plural lenses. Numeral 1 designates a virtual image (image information) indicated for the observer by the optical system 2 from image information 1a formed by the image display generating means 5. Numeral 3 represents a hypothetical symbol for the exit pupil of the optical system 2, which is aligned approximately with the pupil position of the observer's eye 4 and the exit pupil diameter of which is designed to be smaller than the pupil diameter of the eye 4. The observer's eye 4 observes the image information 1 of the virtual image through this exit pupil 3.

Numeral 7 indicates an actuator (scanning means) for moving and controlling the optical system 2 in the X- and Y-directions. The image information generating means 5 is constructed of a liquid crystal display or the like.

Fig. 26 is a perspective view of the image display apparatus of Fig. 25. Fig. 26 shows a state in which the optical system 2 is moved and controlled two-dimensionally in the X- and Y-directions by the

5 It is noted that a movable mirror or the like may
also be used as the means for scanning of the exit
pupil.

15 The image information generating means of the left
and right image display devices are designed to
generate and display the image information in
synchronism with each other. In the present
embodiment, the binocular parallax images may also be
20 displayed independently as the image information
displayed on the left and right image display devices,
whereby the observer can observe a three-dimensional
image.

In the present embodiment the optical system 2 is mechanically moved and controlled to scan the eye 4 of the observer with the exit pupil 3 of the optical system 2 in the horizontal direction or in the

direction normal to the horizontal direction, thereby generating the parallax images in the single eye 4.

Fig. 27 to Fig. 29 are explanatory diagrams to illustrate how to present the parallax image in the observer's single eye 4. In Fig. 27 the optical system 2 forms the exit pupil 3-1. At this time the image information generating means 5 selects and displays the image information (1-1) as a corresponding image. The observer observes the image information 1-1 of a virtual image. After a lapse of an infinitesimal time, the optical system 2 forms the exit pupil 3-2 as illustrated in Fig. 28.

At this time the image information generating means 5 switches to display the image information (1-2) as a corresponding image. Then the observer observes the image information 1-2 of a virtual image. Similarly, the optical system 2 switches to display the image information (1-3) corresponding to formation of the exit pupil 3-3 as illustrated in Fig. 29. Then the observer observes the image information 1-3 of a virtual image.

Fig. 30 is a timing chart to show the timing of the display of the image information 1 (1-1 to 1-3) by the image information generating means 5 and the timing of the formation of the exit pupil 3 (3-1 to 3-3). As illustrated, the positions of the exit pupil 3 are in one-to-one correspondence to the image information 1

displayed. Since the optical system 2 is moved mechanically and continuously, the exit pupil (3-1, 3-2, 3-3) illustrated in Fig. 27 to Fig. 29 is formed instantaneously and the display of the image information at that time is also displayed instantaneously.

In the case that the image display generating means 5 is composed of an LCD, image information can be instantaneously displayed by flash-control of the back light thereof.

Since this switching operation is repeated in cycles shorter than the tolerance time of persistence of vision of the observer's eye, it is carried out without being perceived by the observer at all.

It can also be contemplated that the optical system 2 is moved intermittently and the image information generating means displays the image information, based thereon.

In the present embodiment the size of the exit pupil 3 is set so as to be smaller than the pupil diameter of the observer and the exit pupil is controlled so as to scan by the predetermined distance.

Therefore, the apparatus of the present embodiment can provide the three-dimensional display of "super-multiview regions" in which a plurality of parallax images are incident to the single eye of the observer as in the case of the prior art example described

previously. For implementing such three-dimensional display, the small parallax image information is displayed according to the position of the exit pupil, with synchronism between the display of image information and the formation of exit pupil as described previously.

In this case, the small parallax images to be displayed are obtained as a series of parallax images of the object 8 from view points at the center positions 3-1' to 3-3' of the above exit pupils 3-1 to 3-3 as illustrated in Fig. 31. The parallax images may be obtained as actually taken images by use of the image pickup system or may be virtually generated by computation with the computer.

In the present embodiment, the above parallax images can also be obtained according to the example of the image pickup apparatus (image input apparatus) illustrated in Fig. 14 and Fig. 15.

Namely, the aperture positions 3-1" and 3-2" in Fig. 14 and Fig. 15 correspond to the exit pupils 3-1 and 3-2 (Fig. 27, Fig. 28) during reproduction of image and the images picked up through the respective openings are the small parallax images suitable for the three-dimensional reproduction of "super-multiview regions."

For example, the image (parallax image) picked up through the aperture 3-1" as in Fig. 14 corresponds to

the parallax image 1-1 in Fig. 27 and the image picked up through the aperture 3-2" as in Fig. 15 to the parallax image 1-2 in Fig. 28.

5 The parallax images can be gained similarly by changing the apertures one from another.

10 The small parallax images thus obtained are sent together with the signals to define the correspondence to the aperture positions upon the image pickup to the image transmitting part or recording part (not illustrated) to be transmitted or recorded for the three-dimensional display apparatus of "super-multiview regions."

15 The actually taken data for the three-dimensional display apparatus of "super-multiview regions" is gained by use of the image pickup apparatus as described above. This data can also be obtained on a virtual basis by computation with the computer as described previously. In this case, the parallax images from a plurality of view points can be gained by
20 computation with the computer according to the concept of Fig. 31.

25 In the present embodiment, the number of parallax images displayed in the single eye can be set to an arbitrary value by optionally setting the display positions of the exit pupil 3 and the display images, but the number of single-eye parallaxes practically realized is dependent mainly on the performance of the

003230" 39237360

The shape of the exit pupil 3 can be any shape including a circle, an ellipse, a rectangle, a polygon, and so on.

10 In the present embodiment the scan range of the exit pupil 3 is set slightly greater than the pupil diameter, whereby the observer can observe the whole of the image information 1 even with fine deviation of the pupil position of the observer.

The present embodiment can readily realize the
25 three-dimensional display of "super-multiview regions"
by the smaller number of parallax images than in the
prior art example.

The present embodiment can readily realize the
25 three-dimensional display of "super-multiview regions"
by the smaller number of parallax images than in the
prior art example.

5

10

20

25

5

10

20

25

The optical system 2 is arranged to move

translationally along guide shafts 110 and 120 mounted on a holder 102. The driving force for the translational motion is created by magnets 130 in the optical system 2 and coils 140 on the holder 102, and is controlled by a current or a voltage applied to the coils 140.

Further, as for the vertical direction, the holder 120 can be moved vertically along guide shafts 150 and 160 mounted on a housing (not illustrated), and the driving force therefor is generated by a magnet 170 on the holder 102 and a coil 180 on the housing and is controlled by a current or a voltage applied to the coil 180. The optical system 2 can be moved to predetermined positions by independently controlling the horizontal and vertical positions as described above and the single-eye parallax images are displayed by successively displaying the predetermined parallax images at the predetermined positions.

Fig. 33 is a block diagram to show the flow of control in the present Embodiment 5, in which a controller 20 performs the overall control. The controller 20 controls moving amounts of horizontal movement control unit 21 and vertical movement control unit 22 and also controls the display timing of the image information generating means 5.

According to the present embodiment, while the optical system having the exit pupil smaller than the

003230" 39284950

5

10

20

25

scanning performance of the optical system 2.

The above example requires at least twelve times the image drawing performance and image information processing performance of the ordinary two-dimensional image display means.

Therefore, the forming number of exit pupils is set as small as possible in the present embodiment. Since the effect of vertical parallax is smaller than the effect of horizontal parallax in three-dimensional vision, it is common practice to employ a technique of reducing the volume of information by eliminating the vertical parallaxes (which is a general technique, particularly, in the fields of holographic stereogram and real-time hologram).

In the present embodiment the exit pupils are thus generated only in the horizontal direction as illustrated in Fig. 35. This reduces the number of parallax images to be displayed, to four and thus greatly decreases the volume of image information as compared with the case including the vertical parallaxes. In the present embodiment the image drawing performance and the image information processing performance required for the image information generating means can be lowered to about four times those for the ordinary two-dimensional image display.

The number of horizontal parallax images can be

09642758.082200

any number not less than two.

A specific example of the present embodiment will be presented below. Fig. 36 is a mechanism diagram of the present embodiment. The present embodiment is
5 different from Embodiment 5 in that the optical system 2 can be moved and controlled only in the horizontal direction, and the other structure is the same.

The driving force in the horizontal direction is generated by magnets 130 and coils 140, which is
10 similar to that in Embodiment 5. A movable support mechanism in the horizontal direction is composed of parallel plate springs of thin metal plates (elastic members) 30, 31.

Fig. 37 is a block diagram to show the flow of
15 control in Embodiment 6, which is different from Embodiment 5 in that the vertical movement control unit is excluded and thus the number of displayed parallax images is smaller. The other structure is the same as in Embodiment 5.

20 In the present embodiment the support mechanism described was that of slide support and parallel plate springs, but the support mechanism may be any other support mechanism such as parallel link support or the like. The driving mechanism can also be any other
25 mechanism than the one using the coils and magnets.

The present invention can accomplish the image display apparatus capable of readily displaying the

009648768 082800

stereoscopic image and permitting the observer to observe the stereoscopic image in a good state without feeling fatigued.

5 Figs. 38 to 41 are explanatory diagrams to illustrate the basic concept of the optical system in the image display (observation) apparatus of the present invention. The image display apparatus S according to the present invention has an illumination means 210 including an illumination light source 211
10 consisting of a plurality of unit light sources (211a, 211b, 211c), an optical member (not illustrated), etc.; an image display means 220 for displaying image information 221; a display optical system 230 for forming an enlarged virtual image 221' of the image
15 information 221; and a control means 240 for controlling the operation of the illumination means 210 and the image display means 220.

In Fig. 38, the illumination light source 211 constituting the illumination means 210 is placed at or
20 near the entrance pupil position Q of the display optical system 230 and forms an image 211' of the illumination light source 211 at the position of the exit pupil P of the display optical system 230 kept in the conjugate relation with the entrance pupil Q by the
25 display optical system 230.

The observer matches the entrance pupil of the eye E approximately with the exit pupil P of the display

003230" 89284960

optical system 230 to observe the image (enlarged virtual image) 221' formed by the display optical system 230 from the image information 221 displayed on the image display means 220 illuminated by the illumination means 210. The position, the focal length, etc. of the display optical system 230 are determined so that the optical system 230 forms the enlarged virtual image of the display element surface of the image display means 220, for example, 2 m ahead of the eye E.

The illumination light source 211 consists of a plurality of unit light sources 211a, 211b, 211c arranged one-dimensionally or two-dimensionally in the direction normal to the optical axis La and the unit light sources are lighted up in order by the control means 240, as illustrated in Fig. 39, Fig. 40, and Fig. 41. The plurality of unit light sources 211a to 211c spatially divide the exit pupil P of the display optical system 230 into a plurality of illumination areas (211'a, 211'b, 211'c). Incidence of light to the respective illumination areas is controlled in a time-sharing manner by controlling emission of light from the plurality of unit light sources.

Each area has the width smaller than the pupil of the observer's eye E.

Each of the illumination areas (211'a, 211'b, 211'c) can be set in such a size (area) that the

At this time the control means 240 switches the image information displayed on the image display means 220 between the image information (parallax images) 221a, 221b, 221c of mutually different parallaxes in correspondence to switching of lighting of the above unit light sources. The image information (parallax images) 221a, 221b, 221c is parallax images of an object to be reproduced, taken from view points at the center positions of the respective areas 211'a, 211'b, 211'c. This permits the observer to observe a stereoscopic image.

In the present embodiment a pair of image display devices S are provided for the left and right eyes of the observer, as illustrated in Fig. 3, to be used as a head-mounted display apparatus (image observation system).

The above structure and control allow the plurality of parallax images to be entered into the

observer's single eye in time series or simultaneously as described hereinafter, as in the aforementioned prior art example, thereby implementing the stereoscopic display of "super-multiview regions."

5 Since in the present embodiment the parallax images generated can effectively be provided into the observing eye, the number of parallax images generated can be decreased, thereby compactifying and simplifying the apparatus.

10 Specific embodiments of the present invention will be described hereinafter in order.

(Embodiment 7)

Fig. 42 is a schematic diagram to show the main part of Embodiment 7 of the image display apparatus of the present invention. The present image display apparatus has the illumination means 210 having the illumination light source 211, the image display means 220 having a display element 225 for displaying the image information including parallax images, the display optical system 230 including a concave mirror 232 of a spherical surface or an aspherical surface or the like for guiding the image information displayed on the image display means 220 illuminated by the light from the illumination means 210, to the observer's eye E, and the control means 240. The illumination optical system 211 consists of a plurality of unit light sources 211a, 211b, 211c.

15

20

25

003230" 39484960

Beams successively emitted in time series from the plurality of unit light sources 211a, 211b, 211c of the illumination light source 211 travel through a polarizer 223 to become linearly polarized light, part of which is transmitted by a half-silvered mirror 231 to be guided to the display element 225 of the image display means 220. The display element 225 is a reflective display device such as a reflective liquid crystal panel or the like having the pixel structure, which has the function of reflecting the linearly polarized light, for example, with rotating the direction of polarization of the light incident to pixels in "on" display portions by 90° but maintaining the direction of polarization of the light incident to pixels in "off" display portions.

The beams reflected by the display element 225 are reflected in part by the half-silvered mirror 231 and the reflected beams are then reflected by the concave mirror 232. The reflected beams are transmitted in part by the half-silvered mirror 231 to be guided to a polarizer 224. The polarizer 224 is placed so that its transmission polarization axis is perpendicular to that of the polarizer 223. Since the polarization direction of the reflected light from the pixels in the "on" display portions of the display element 225 is rotated by 90°, it travels through the polarizer 224 to be guided to the observer's eye E. However, since the

09649768-082800

5
10

15
20

25

The position, the focal length, etc. of the display optical system 230 are determined so that the enlarged virtual image of the image information on the display element surface 225 of the image display means 220 is
5 formed, for example, 2 m ahead of the eye.

A control circuit 240 performs control of appropriate time-division switching of the illumination light source 211 and the parallax images displayed on the display element 226 so as to time-serially input
10 the plurality of parallax images into the single eye of the observer, based on the observation principles illustrated in Fig. 39 to Fig. 41, thereby implementing the stereoscopic display of "super-multiview regions."

The embodiment illustrated in Fig. 42 employed the
15 reflective liquid crystal panel as the display element of the display means 220, but a transmissive display element may also be employed as illustrated in Fig. 43.

In Fig. 43, the elements having the same functions as those in the embodiment illustrated in Fig. 42 are
20 denoted by the same reference symbols and the description thereof is omitted herein. The illumination light emitted from the illumination light source 211 of the illumination means 210 is refracted by condenser lens 212 to be guided to the display
25 element 226 of the display means 220. The display element 226 is a transmissive display device comprised of a polarizer and a transmissive liquid crystal panel

003230" B3ZB4960

008230" 89284560

or the like. The light transmitted by the display element 226 is guided through the display optical system 230 including the half-silvered mirror, the concave mirror, etc. to the observer's eye E. The focal length, the position, etc. of the condenser lens 212 are determined so that the image position of the illumination light source 211 formed by the condenser lens 212 is matched to the entrance pupil position Q of the display optical system 230. The display optical system 230 forms an image of the illumination light source 211 at the position of the exit pupil P thereof. The observer matches the entrance pupil of the eye E approximately with the exit pupil P of the display optical system 230 to observe the enlarged virtual image formed by the display optical system 230 from the image information displayed on the image display means 220 illuminated by the illumination light source 211.

The control circuit 240 performs the control of appropriate time-division switching of the illumination light source 211 and the display element 226 so as to input the plurality of parallax images into the single eye of the observer, based on the observation principles illustrated in Fig. 39 to Fig. 41, thereby permitting the stereoscopic display of "super-multiview regions."

(Embodiment 8)

Fig. 44 is a schematic diagram to show the main

part of Embodiment 8 of the image display apparatus of the present invention. Just as in Embodiment 7 illustrated in Fig. 43, the present image display apparatus has the illumination means 210 having the illumination light source 211, the image display means 220 having the display element 226 for displaying the image information including parallax images, the display optical system 230 including a prism body 233 for guiding the image information displayed on the image display means 220 illuminated by the light from the illumination means 210, to the observer's eye E, and the control means 240.

The elements having the same functions as those in the embodiment illustrated in Fig. 43 are denoted by the same reference symbols and the description thereof is omitted herein.

The illumination beams successively emitted in time series from the plurality of unit light sources (211a, 211b, 211c) of the illumination light source 211 are refracted by the condenser lens 212 to be guided to the display element 226 of the image display means 220. Beams transmitted by the display element 226 are incident to the prism body 233 while being refracted by a surface 234 thereof. The light incident to the prism body 233 is incident at angles of incidence over the critical angle to a surface 235 to be reflected totally thereby. The light is then reflected by a mirror

surface 236 to be again incident at angles of incidence below the critical angle this time to the surface 235. The light emerges from the prism body 233 while being refracted. The emergent light is guided to the entrance pupil of the observer's eye E.

The prism body 233 of the present embodiment is constructed so as to include a decentered, rotationally asymmetric surface with optical powers differing depending upon azimuthal angles, in order to correct well for aberration caused by the inclined arrangement of the surfaces having the optical power. This structure reduces the size of the display optical system 230. The position, the focal length, etc. of the prism body 233 are determined so that the enlarged virtual image of the display element surface 226 of the display means 220 is formed, for example, 2 m ahead of the eye E.

The display optical system 230 forms the image of the illumination light source 211, i.e., the images of the unit light sources 211a to 211c at the position of the exit pupil P. The observer matches the entrance pupil of the eye E approximately with the exit pupil P of the display optical system 230 to observe the enlarged virtual image formed by the display optical system 230 from the image information displayed on the image display means 220 illuminated by the illumination light source 211.

The control circuit 240 performs the control of appropriate time-division switching of the illumination light source 211 and the display element 226 so as to input the plurality of parallax images into the single eye of the observer, based on the observation principles illustrated in Fig. 39 to Fig. 41, thereby permitting the stereoscopic display of "super-multiview regions."

In the embodiment illustrated in Fig. 44, the display element of the display means 220 may be replaced by the reflective display element as illustrated in Fig. 45. The elements having the same functions as those in the embodiments illustrated in Fig. 42 and Fig. 48 are denoted by the same reference symbols and the description thereof is omitted herein.

In Fig. 45, the illumination light emitted from the illumination light source 211 of the illumination means 210 is refracted by the condenser lens 212 to travel through the polarizer 223 to become linearly polarized light. The linearly polarized light is incident to a prism 213 while being refracted by a surface 214 thereof. The prism 213 is a triangular prism consisting of planes or including a curved surface if necessary. The light incident to the prism 213 is incident at angles over the critical angle to a surface 215 to be reflected totally thereby. The reflected light then emerges from the prism 213 while

5

10

15

25

The control circuit 240 performs the control of appropriate time-division switching of the illumination light source 211 and the display element 225 so as to input the plurality of parallax images into the single eye of the observer, based on the observation principles illustrated in Fig. 39 to Fig. 41, thereby permitting the stereoscopic display of "super-multiview regions."

Fig. 46 shows the illumination light source 211 used when the parallax images of totally six parallaxes, three parallaxes in the horizontal direction and two parallaxes in the vertical direction, are presented to the observer's eye. The number of parallax images presented to the observer's eye is preferably set as large as possible within the switchable range of the illumination light source and the display element, and thus the present invention is

not limited to this number. Since the effect of horizontal parallax is greater than that of vertical parallax in stereoscopic vision, the number of horizontal parallaxes is desirably set larger than the number of vertical parallaxes.

For this reason, more unit light sources are placed in the horizontal direction than in the vertical direction. In order to input the plurality of parallax images into the observer's eye, it is preferable to set the center spacing between images of the unit light sources 211a to 211f forming the illumination light source 211, to not more than 3 mm on the exit pupil P of the display optical system. If the size of the images of the illumination light source 211 is too large on the exit pupil P of the display optical system, it will become necessary to set the number of unit light sources and the number of parallax images very large by that degree, which will result in increasing the complexity and the scale of the apparatus. In order to input the parallax images effectively into the observer's eye, the size of the images of the illumination light source 211 formed on the exit pupil P of the display optical system is thus desirably not more than 20 mm in the horizontal direction, taking the ocular movement of the observer's eye etc. into consideration. Therefore, the size of the exit pupil of the display optical system is

desirably set a little larger than the size of the images of the illumination light, specifically, not more than 30 mm in the horizontal direction, also taking the adjustment range etc. into consideration.

5 The pupil diameter of the display optical system, the pupil image magnification, the sizes of the illumination light source and the unit light sources, etc. are determined based on these conditions.

10 The illumination light source 211 is constructed of an emitter array such as an EL panel or an LED array, or has either of the structures as illustrated in Figs. 47A, 47B, 47C, and 47D or the like.

15 In Fig. 47A, a unit light source 51 is composed of a light emitter 52 and a pinhole 53 under illumination with light therefrom. A shield plate 54 is provided for preventing light from the emitter 52a of an adjacent unit light source from leaking in.

20 In Fig. 47B, a unit light source 51 is constructed of a diffuser 55 illuminated by the light emitter 52. A shield plate 54 is provided for preventing the light from the adjacent emitter 52a from leaking in.

25 In Fig. 47C, the illumination light source 211 is composed of a surface emission light source 56 consisting of a cold-cathode tube and a lightguide plate or the like, and a transmissive, spatial light modulator 57 such as a transmissive liquid crystal panel or the like. A unit light source 51 is comprised

of one pixel or several pixels of the transmissive,
spatial light modulator 57.

In Fig. 47D, the illumination means 210 is
composed of a surface emission light source 58, a lens
59, a half-silvered mirror 61, and a reflective,
spatial light modulator 60 such as a reflective liquid
crystal panel or the like. The illumination light
source 11 includes elements 58, 60, and so on. One
unit light source 51 out of a plurality of unit light
sources forming the illumination light source 11 is
comprised of one pixel or several pixels of the
reflective, spatial light modulator 60.

In Fig. 47D light from the surface emission light
source 58 is condensed by the lens 59 and then is
reflected by the half-silvered mirror 61 to form a
light source image on the spatial light modulator 60.
Light modulated and reflected in a part of the spatial
light modulator 60 including a predetermined number of
pixels (51) is extracted through the half-silvered
mirror 61 to be used as one illumination light source
51.

The plurality of unit light sources separated
based on the area are realized by constructing the
illumination means as described above. The shape of so
the unit light sources does not always have to be
rectangular as illustrated, but may be circular,
elliptic, or polygonal.

In the embodiments illustrated in Fig. 42 to Fig. 45, the illumination light source 210 and the display element 221 were subjected to the high-speed time-division switching control in order to input the plurality of parallax images into the observer's eye, but the effect similar thereto can also be achieved by providing a plurality of display means 220 and simultaneously inputting the plurality of parallax images into the single eye without the time-division switching control.

(Embodiment 9)

Fig. 48 is a schematic diagram to show the main part of Embodiment 9 of the image display apparatus according to the present invention. The present image display apparatus has a plurality of unit light sources 71a, 71b, and 71c, a plurality of display devices 81a, 81b, and 81c corresponding to the respective unit light sources, and a display optical system 90.

The display optical system 90 has a cross prism 91 and an optical element 94. The plurality of unit light sources 71a to 71c are placed in a state in which optical paths thereof, when expanded, are shifted from each other in the direction normal to the optical axis. Light emitted from the unit light source 71a travels through the transmissive display element 81a, such as a transmissive liquid crystal panel or the like, to enter the cross prism 91. A half-mirror coat is formed on

The light incident to the cross prism 91 is reflected in part by the surface 92 and the reflected light emerges from the cross prism 91. The emergent light is guided to the observing eye E while being converged by the optical element 94 having a positive optical power. The illumination light source 71a is located at the entrance pupil position of the display optical system 90 and the display optical system 90 forms an image 71a' of the illumination light source 71a on the exit pupil P thereof.

Similarly, light emitted from the unit light source 71b or 71c illuminates the transmissive display element 81b or 81c, respectively, to be guided through the display optical system 90 to the observing eye E. The display optical system 90 forms an image 71b', 71c' of the unit light source 71b, 71c on the exit pupil P thereof.

The observer matches the entrance pupil of the eye E approximately with the exit pupil P of the display optical system 90 to observe the enlarged virtual images formed by the display optical system 90 from the image information displayed on the transmissive display elements 81a, 81b, 81c illuminated by the unit light sources 71a, 71b, 71c. The position, the focal length, etc. of the display optical system 90 are determined so that the enlarged virtual images of the display element

The control means not illustrated can input the plurality of parallax images simultaneously into the single eye of the observer by simultaneously switching the unit light sources 71a, 71b, 71c on and displaying the parallax images corresponding to the images 71a', 71b', 71c' of the respective unit light sources on the transmissive display elements 81a, 81b, 81c, and thereby permits the stereoscopic display of "super-multiview regions."

By providing a plurality of display units and illumination units for illuminating the respective display units as described above, the stereoscopic display of "super-multiview regions" can be implemented without use of high-speed image display means.

In the present embodiment, the plurality of unit light sources may be modified so as to be switched on in time series.

Fig. 49 is an explanatory diagram to show another example of the display optical system 90 in the present embodiment. In Fig. 49 the elements having the same functions as those in the embodiment illustrated in Fig. 48 are denoted by the same reference symbols and the description thereof is omitted herein.

The light emitted from the unit light source 71a

travels through the transmissive display element 81a to
be reflected in part by a half-silvered mirror 95. The
reflected light is transmitted in part by a half-
silvered mirror 99 while being converged by optical
5 elements 96, 97. The convergent beam is guided to the
pupil of the observing eye E. A half-mirror coat is
formed on a surface 98 forming the optical element 97.
The light emitted from the unit light source 71b
travels through the transmissive display element 81b to
10 be transmitted in part by the half-silvered mirror 95.
The transmitted light travels through the optical
elements 96, 97 and through the half-silvered mirror 99
to be guided to the pupil of the observing eye E, as in
the case of use of the unit light source 71a.

15 The light emitted from the unit light source 71c
travels through the transmissive display element 81c to
be reflected in part by the half mirror 99. The
reflected light is reflected and converged by the half-
mirror surface 98 having a positive optical power on
20 the optical element 97 and then is transmitted again by
the half mirror 99 to be guided to the pupil of the
observing eye E. The relative positional relation
among the illumination light sources, the display
elements, the display optical system, and the observing
25 eye is the same as in the embodiment illustrated in
Fig. 48. As described, the present invention forces no
restrictions on the form of the display optical system

09648768-082800

90.

In Fig. 48 and Fig. 49, it is also possible to increase the number of parallax images presented to the observing eye, by constructing the unit light sources 71a, 71b, 71c of the plurality of unit light sources as illustrated in Fig. 46, further driving the display elements 81a, 81b, 81c in a time-sharing manner, and properly controlling lighting of the unit light sources and the display images on the display elements.

10 (Embodiment 10)

Embodiment 10 of the image display apparatus of the present invention will be described below.

There are conventionally known techniques of realizing the color display by switching colors (R, G, B) of the illumination light sources by use of a reflective, monochromatic panel (spatial light modulator of a single color) capable of driving at high speed and by displaying corresponding display images in synchronism therewith.

20 In the present embodiment the image display apparatus is constructed using such display elements, as illustrated in Fig. 50, Fig. 51, and Fig. 52.

Fig. 50, Fig. 51, and Fig. 52 are schematic diagrams to show the main part of Embodiment 10 of the image display apparatus according to the present invention. The present image display apparatus has illumination light sources 72, 73 each constructed of a

The illumination light source 72 is an illumination light source emitting the illumination light including blue light and green light, and the illumination light source 73 an illumination light source emitting red light. A dichroic filter reflecting the red light but transmitting the blue light and green light is formed on a surface 304 forming an optical element 303.

The light emitted from the illumination light source 72 travels through a polarizer 84 to become linearly polarized light. The linearly polarized light is transmitted in part by a half-silvered mirror 301. The transmitted light travels through a blue filter 85 absorbing the light other than the blue light to turn into blue light. The blue light is guided to the reflective monochromatic panel 82B. The reflective monochromatic panel 82B is a reflective display element such as a reflective liquid crystal panel or the like having the pixel structure, which has the function of reflecting the linearly polarized light, for example, so as to rotate the direction of polarization of the light incident to pixels in "on" display portions by 90° but maintain the direction of polarization of the

The blue light reflected by the reflective monochromatic panel 82B is transmitted by the blue color filter 85 and is reflected in part by the hal

dichroic filter surface 304 while being converged by optical elements 302, 303 having a positive optical

The polarizer 89 is placed so that the transmission polarization axis thereof is perpendicular to that of the polarizer 84.

light from the pixels in the "on" display portions of the reflective monochromatic panel 82B undergoes 90°

rotation, it travels through the polarizer 89 to be guided to the observing eye E. However, since the

polarization direction of the reflected light from the pixels in the "off" display portions of the reflective

monochromatic panel 82B is maintained, the reflected light is intercepted by the polarizer 89 to be prevented from entering the observing eye E.

On the other hand, the light emitted from the illumination light source 72, transmitted by the polarizer 84, and reflected by the half mirror 301 travels through a green filter 86 absorbing the light other than the green light to turn into green light to

The green light reflected by the reflective monochromatic panel 82G is transmitted by the green color filter 86 and is transmitted in part by the half

10

15

20

25

again by the half mirror 305 to be guided to the polarizer 89.

According to the principle similar to that of the blue light described above, only the reflected light from pixels in "on" display portions of the reflective monochromatic panel 82R is transmitted by the polarizer 89 to enter the observing eye E.

The illumination light sources 72, 73 are located at the entrance pupil position of the display optical system 300 and the display optical system 300 forms images of the illumination light sources 72, 73 on the exit pupil P thereof.

The observer matches the entrance pupil of the eye E approximately with the exit pupil P of the display optical system 300 to observe the enlarged virtual images formed by the display optical system 300 from the image information displayed on the reflective monochromatic panels 82R, 82G, 82B illuminated by the illumination light sources 72, 73. The position, the focal length, etc. of the display optical system 300 are determined so that the enlarged virtual images of the display element surfaces of the reflective monochromatic panels 82R, 82G, 82B are formed in front of the eye E, for example, 2 m ahead.

The illumination light source 72 is composed of a plurality of unit light sources 72a, 72b, 72c as illustrated in Fig. 46 and the unit light sources are

009230"89284950

5
10
15

20

25

The present invention can thus accomplish the

5 In addition, the structures as described above
according to the present invention permit the
stereoscopic display of "super-multiview regions"
without use of very fast image display means and image
generating means and without use of many image display
0 means, and the image display apparatus can be
accomplished in the simple and compact structure.

1. An image display apparatus comprising image display means for displaying a parallax image, a display optical system for guiding light from the image display means to a position of an exit pupil, exit pupil control means for spatially and temporally dividing the exit pupil into a plurality of areas and controlling a passing beam to each area, and image switching control means for controlling switching between parallax images of the image display means in correspondence to passing beams through the respective areas of the exit pupil, wherein a plurality of parallax images are perceived by a single eye of an observer.

15 2. An image display apparatus comprising image
display means for displaying a parallax image, a
display optical system for guiding light from the image
display means to a position of an exit pupil, and exit
20 pupil control means for controlling a position or a
size of the exit pupil in a direction perpendicular to
the optical axis, dividing the exit pupil into a
plurality of areas, and successively generating the
plurality of divided areas of the exit pupil without
25 duplication, wherein the image display means
successively displays corresponding parallax images
according to beams passing the respective areas thus

generated.

3. The image display apparatus according to Claim
1 or 2, wherein said exit pupil has a diameter two to
5 five times larger than a diameter of the pupil of the
observer using said image display apparatus.

4. The image display apparatus according to Claim
1 or 2, wherein any one of the plurality of areas in
10 said exit pupil has a size not more than half a size of
the pupil of the observer using said image display
apparatus.

5. The image display apparatus according to Claim
15 1 or 2, said image display apparatus being mounted on
the head of the observer, wherein said exit pupil is
fixed at the position of the pupil of the observer.

6. The image display apparatus according to Claim
20 1 or 2, wherein said exit pupil is divided into a
plurality of areas only in the horizontal direction.

7. The image display apparatus according to Claim
1 or 2, wherein said image display means comprises a
25 transmissive spatial light modulator and said exit
pupil control means comprises a self-emissive spatial
light modulator.

0032290" 59494960

8. The image display apparatus according to Claim
1 or 2, wherein said image display means comprises a
self-emissive spatial light modulator and said exit
pupil control means comprises a transmissive spatial
5 light modulator.

9. The image display apparatus according to Claim
1 or 2, wherein each of said image display means and
said exit pupil control means comprises a transmissive
10 spatial light modulator.

10. The image display apparatus according to
Claim 1 or 2, wherein said exit pupil control means
comprises a micro-mirror device.
15

11. An image display apparatus comprising image
display means for displaying a parallax image, a
display optical system for guiding light from the image
display means to a dividing aperture, said dividing
20 aperture having a plurality of apertures, wherein an
arbitrary aperture out of the plurality of apertures is
selected as a passing area of light, and control means
for controlling a position of the light-passing
aperture in the dividing aperture and the parallax
25 image displayed on the image display means.

12. The image display apparatus according to

09543768-082800

Claim 11, wherein said dividing aperture has a diameter two to five times larger than a diameter of the pupil of the observer using said image display apparatus.

5 13. The image display apparatus according to Claim 11, wherein any one of the plurality of apertures in said dividing aperture has a size not more than half a size of the pupil of the observer using said image display apparatus.

10 14. The image display apparatus according to Claim 11, said image display apparatus being mounted on the head of the observer, wherein said dividing aperture is fixed at the position of the pupil of the
15 observer.

 15. The image display apparatus according to Claim 11, wherein said dividing aperture is divided into a plurality of apertures only in the horizontal
20 direction.

 16. The image display apparatus according to Claim 11, wherein said image display means comprises a transmissive spatial light modulator and said dividing
25 aperture comprises a self-emissive spatial light modulator.

005230 "B3/67960

17. The image display apparatus according to
Claim 11, wherein said image display means comprises a
self-emissive spatial light modulator and said dividing
aperture comprises a transmissive spatial light
5 modulator.

18. The image display apparatus according to
Claim 11, wherein each of said image display means and
said split aperture comprises a transmissive spatial
10 light modulator.

19. An image input apparatus comprising imaging
means for imaging an object, an imaging optical system
for guiding light from the object to the imaging means,
15 aperture generating means for spatially and temporally
dividing a pupil of the imaging optical system into a
plurality of areas and controlling a passing beam to
each area, and control means for controlling switching
between parallax images taken by the imaging means in
20 correspondence to the respective areas of the pupil so
as to effect input of the parallax images.

20. An image input apparatus comprising imaging
means for imaging object information, an imaging
25 optical system for guiding light from an object to the
imaging means, aperture generating means for
controlling a position or a size of a pupil of the

008280" 89284950

imaging optical system, dividing the pupil into a plurality of areas, and limiting a beam-passing area, and control means for making the imaging means successively take corresponding parallax images according to positions of the aperture of the pupil.

21. The image input apparatus according to Claim 19 or 20, wherein said pupil is divided into a plurality of areas only in the horizontal direction.

22. The image input apparatus according to Claim 19 or 20, wherein said aperture generating means comprises a transmissive spatial light modulator.

23. A stereoscopic display system comprising the image display apparatus of Claim 1, 2, or 11, and the image input apparatus of Claim 19 or 20.

24. A stereoscopic display system comprising imaging means for imaging an object, an imaging optical system for guiding light from the object to the imaging means, aperture generating means for spatially and temporally dividing a pupil of the imaging optical system into a plurality of areas and controlling a passing beam to each area, control means for controlling switching between parallax images taken by the imaging means in correspondence to the respective

09648768-02800

areas of the pupil so as to effect input of the
parallax images, image display means for displaying a
parallax image, a display optical system for guiding
light from the image display means to a position of an
5 exit pupil, exit pupil control means for spatially and
temporally dividing the exit pupil into a plurality of
areas and controlling a passing beam to each area, and
image switching control means for controlling switching
of the parallax images taken by the imaging means, to
10 the parallax images on the image display means in
correspondence to passing beams through the respective
areas, wherein a plurality of parallax images are
perceived by a single eye of an observer.

15 25. The stereoscopic display system according to
Claim 23, wherein a position and a size of the pupil of
said imaging optical system are approximately equal to
those of said exit pupil.

20 26. An image display apparatus wherein an optical
system comprising image information generating means
for displaying a parallax image and a display optical
system for guiding light from the image information
generating means to a pupil of an observer is moved to
25 scan in front of the pupil of the observer by scanning
means whereby a plurality of parallax images are
perceived by a single eye of the observer.

5

10

15

20

25

32. The image display apparatus according to Claim 26 or 27, wherein said image information generating means displays different parallax images

33. The image display apparatus according to Claim 26 or 27, said image display apparatus being mounted on the head of the observer, wherein said exit pupil is fixed so as to be matched with the position of the pupil of the observer.

10
15
20
25

observer by making use of control means for time-
divisionally controlling radiation of light from the
plurality of unit light sources so as to control time
division of the exit pupil of the display optical
5 system into the plurality of illumination areas and for
controlling switching between image information
displayed on the image display means in correspondence
to circumstances of incidence of light to the
respective illumination areas.

10

35. An image display apparatus comprising a
plurality of image display means capable of displaying
image information with parallax, at least one
illumination means having an illumination light source
15 for illuminating the plurality of image display means,
and a display optical system for guiding light from the
plurality of image display means to an observing eye,
in which the illumination light source is located at or
near a position optically equivalent to an entrance
20 pupil of the display optical system and in which a
position of an exit pupil of the display optical system
is approximately matched with a position of an entrance
pupil of the observing eye so as to permit observation
of the image information, wherein the illumination
25 light source comprises a plurality of unit light
sources, wherein images of the unit light sources
spatially divide the exit pupil of the display optical

003230 89794960

system into a plurality of illumination areas, and
wherein a plurality of parallax images are made
incident simultaneously or time-serially into a single
eye of an observer by making use of control means for
5 controlling parallax images displayed on the plurality
of image display means in correspondence to radiation
of light from the plurality of unit light sources.

36. The image display apparatus according to
10 Claim 35, comprising a plurality of said illumination
means, wherein said control means time-divisionally
controls radiation of light from the plurality of unit
light sources in the illumination light source of each
illumination means, thereby time-divisionally
15 controlling incidence of light to the plurality of
illumination areas in the exit pupil of the display
optical system, and wherein said control means controls
switching between parallax images displayed on the
plurality of image display means in correspondence to
20 incidence of light to the plurality of illumination
areas.

37. The image display apparatus according to
Claim 34, 35, or 36, wherein a horizontal size of the
25 exit pupil of said display optical system is not more
than 30 mm.

003280" 39784950

38. The image display apparatus according to either one of Claims 34 to 36, wherein the plurality of unit light sources of said illumination light source are comprised of a light emitter array.

5

39. The image display apparatus according to either one of Claims 34 to 36, wherein the plurality of unit light sources of said illumination light source are comprised of a surface illuminant and a transmissive spatial light modulator.

10

40. The image display apparatus according to either one of Claims 34 to 36, wherein the plurality of unit light sources of said illumination light source are comprised of a surface illuminant and a reflective spatial light modulator.

15

41. The image display apparatus according to either one of Claims 34 to 36, wherein said image display means comprises a transmissive spatial light modulator.

20

42. The image display apparatus according to either one of Claims 34 to 36, wherein said image display means comprises a reflective spatial light modulator.

25

00649758 002200

43. The image display apparatus according to
either one of Claims 34 to 36, wherein said display
optical system has a prism body comprising a
decentered, rotationally asymmetric, reflecting surface
5 with optical powers differing depending upon azimuthal
angles.

44. An image display system wherein a pair of the
image observation apparatus as set forth in either one
10 of Claims 34 to 36 are provided for the left and right
eyes of the observer.

45. The image display apparatus according to
Claim 28, wherein one cycle of scanning effected by
15 said scanning means is within time of persistence of
vision for the observer.

46. The image display apparatus according to
Claim 28, wherein said image information generating
20 means displays different parallax images corresponding
to said scan.

47. The image display apparatus according to
Claim 28, said image display apparatus being mounted on
25 the head of the observer, wherein said exit pupil is
fixed so as to be matched with the position of the
pupil of the observer.

00648768-00000000

5

10

FIG. 1

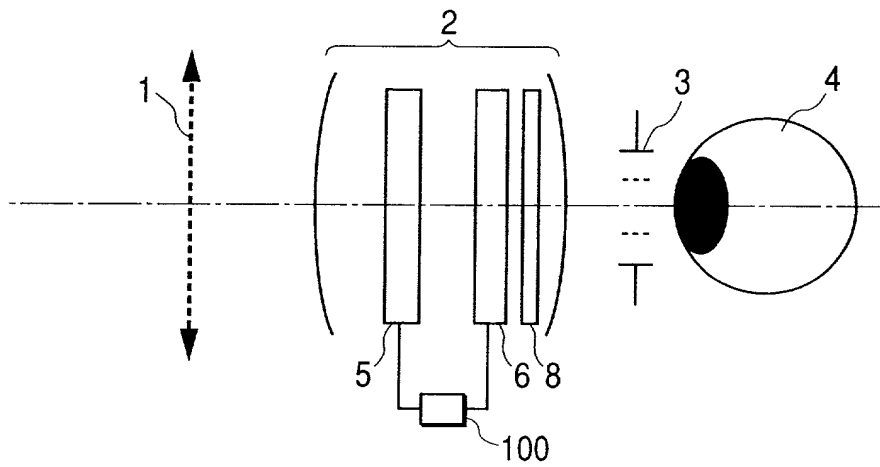


FIG. 2

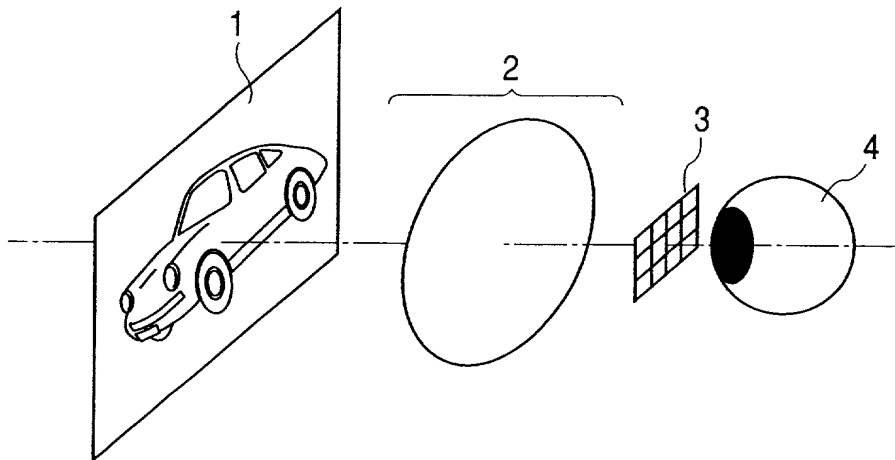


FIG. 4

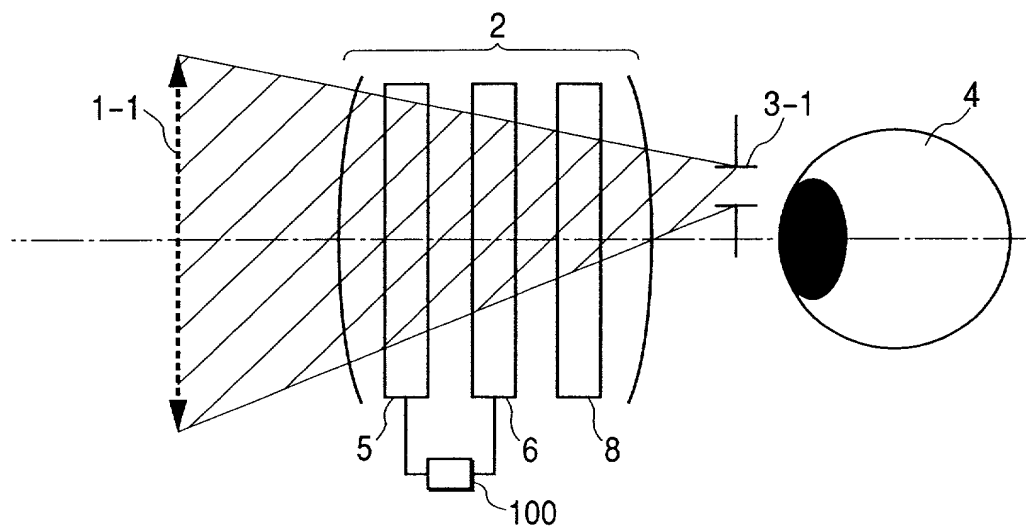


FIG. 5

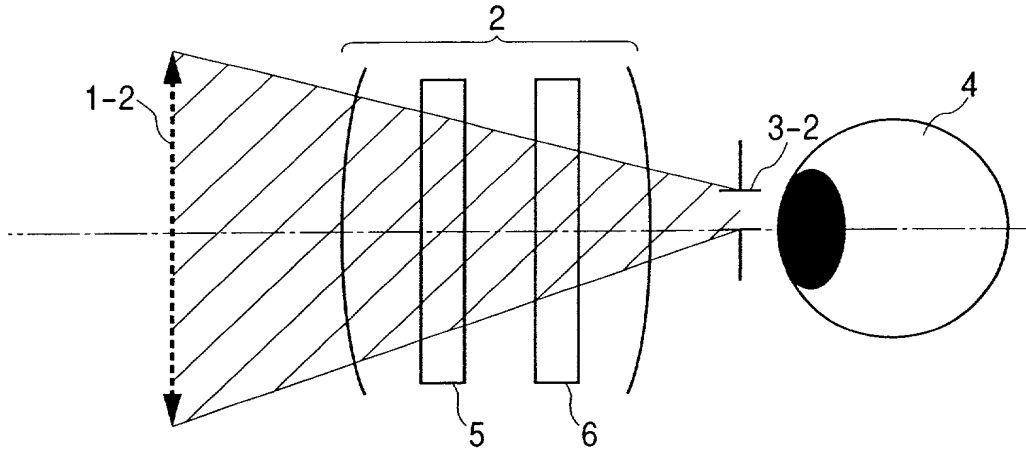


FIG. 6

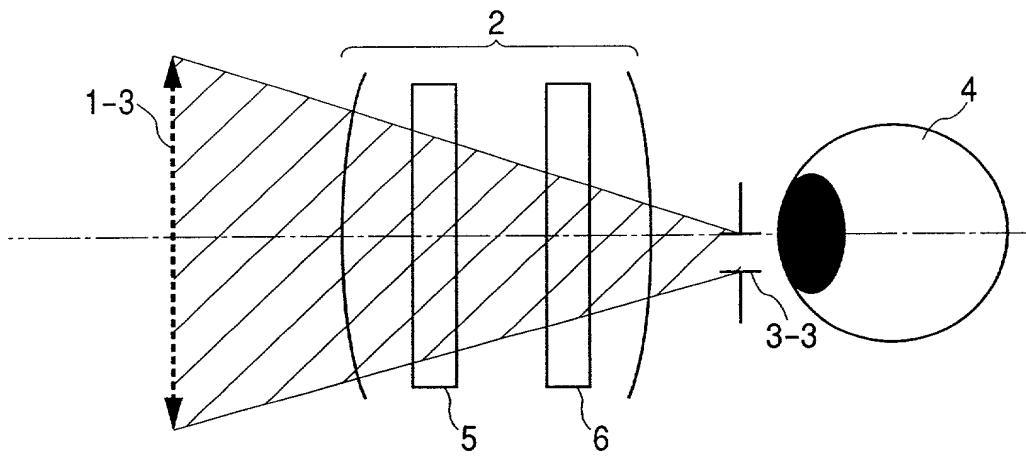


FIG. 7

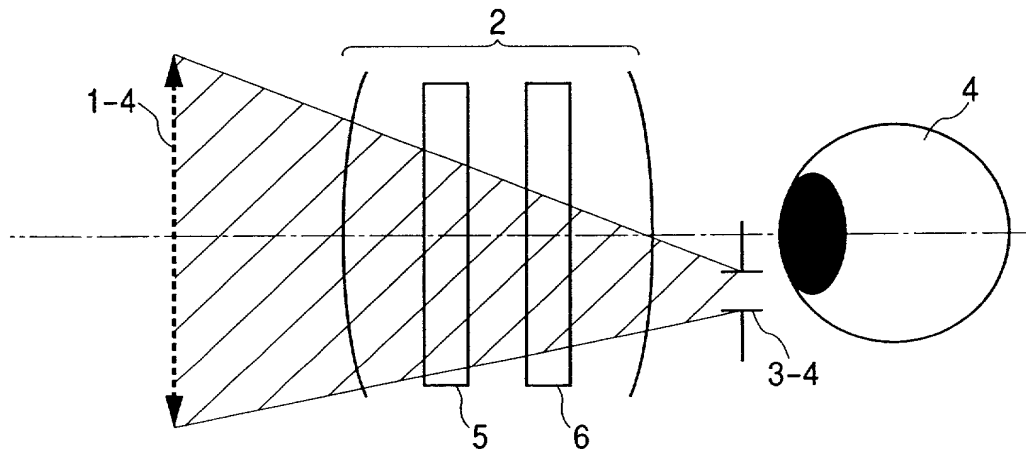


FIG. 8

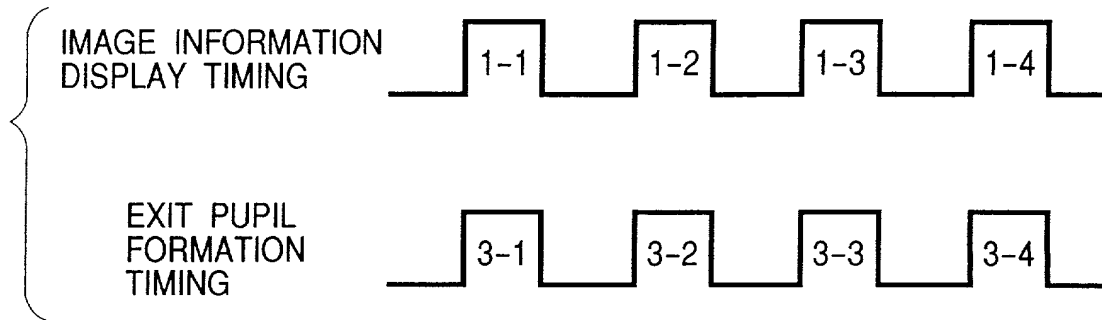


FIG. 9

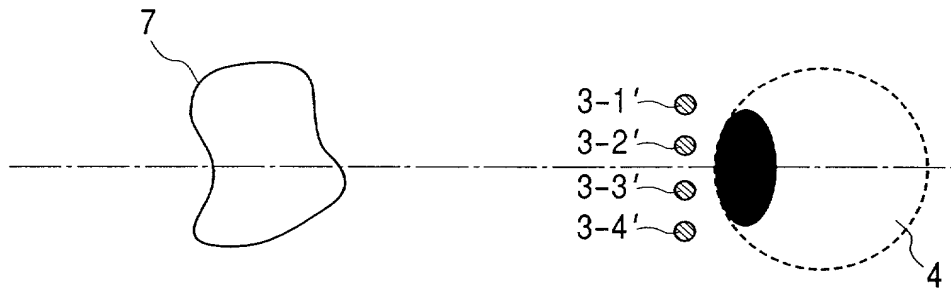
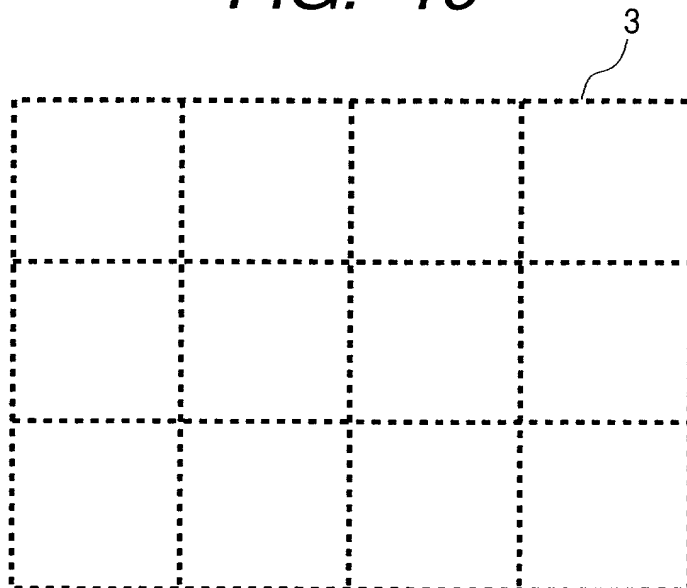


FIG. 10



00320" B9ZB4960

FIG. 13

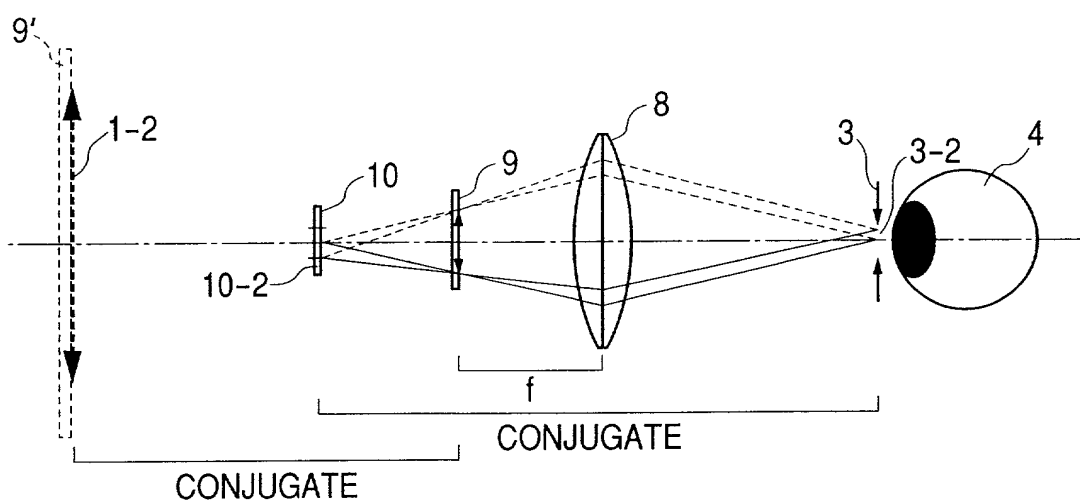


FIG. 14

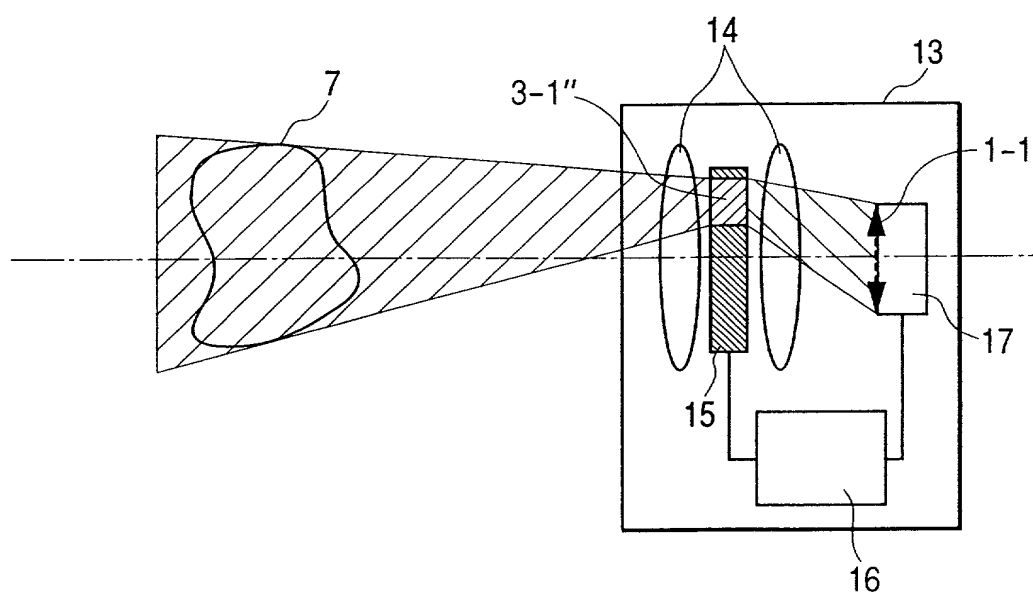


FIG. 15

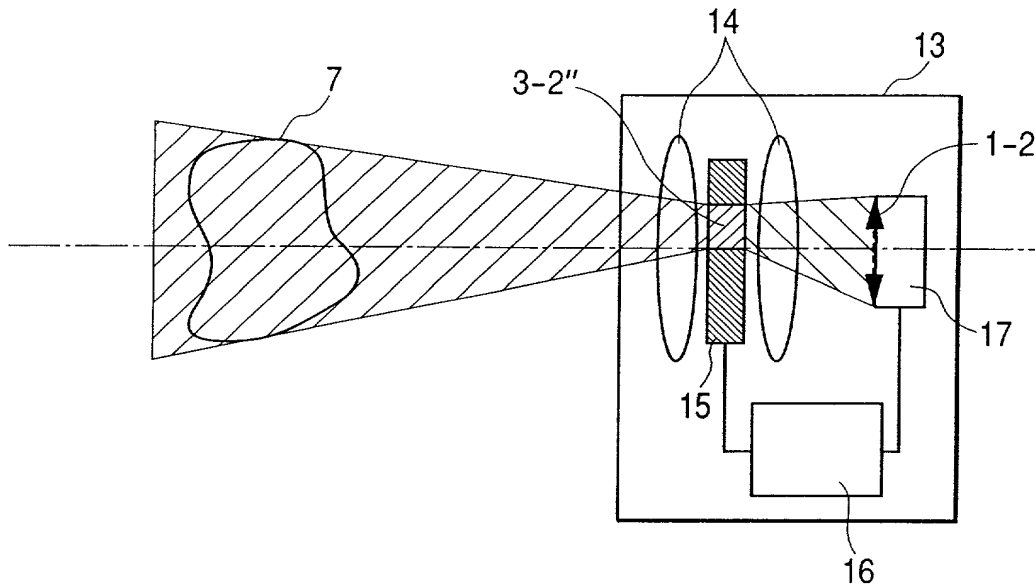


FIG. 16

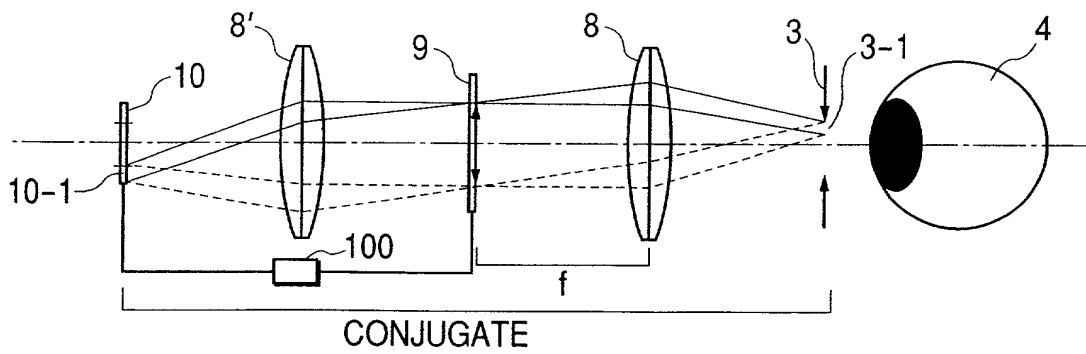


FIG. 17

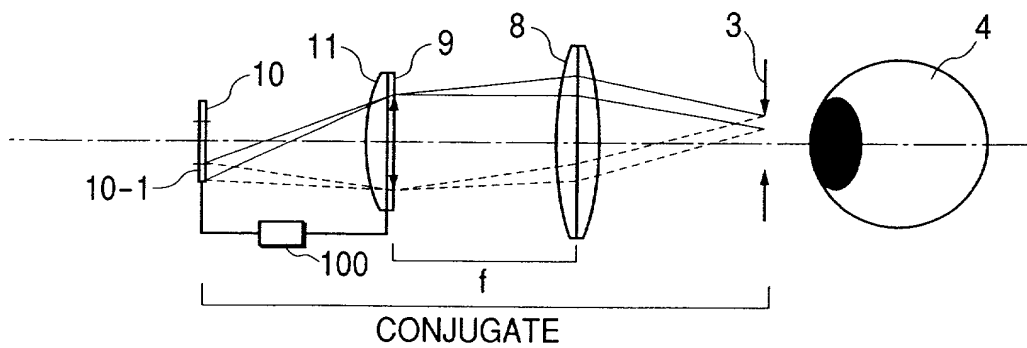


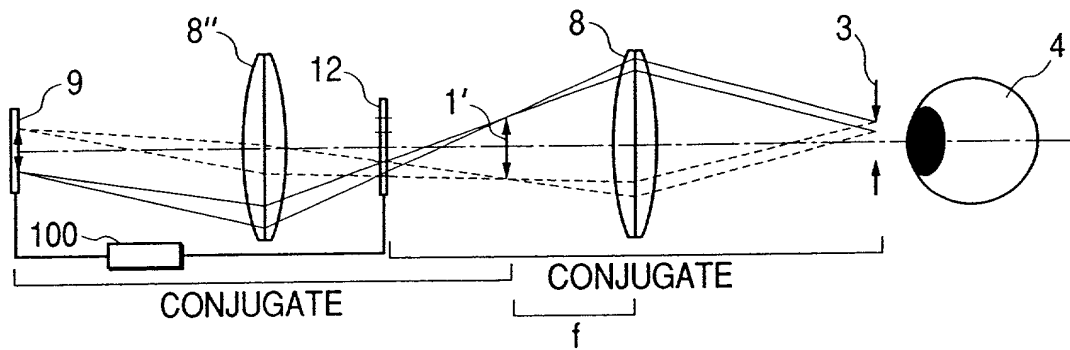
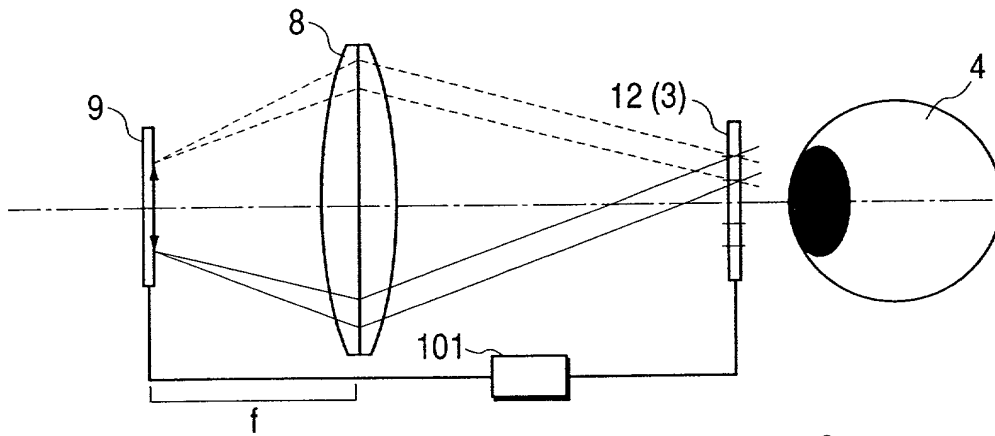
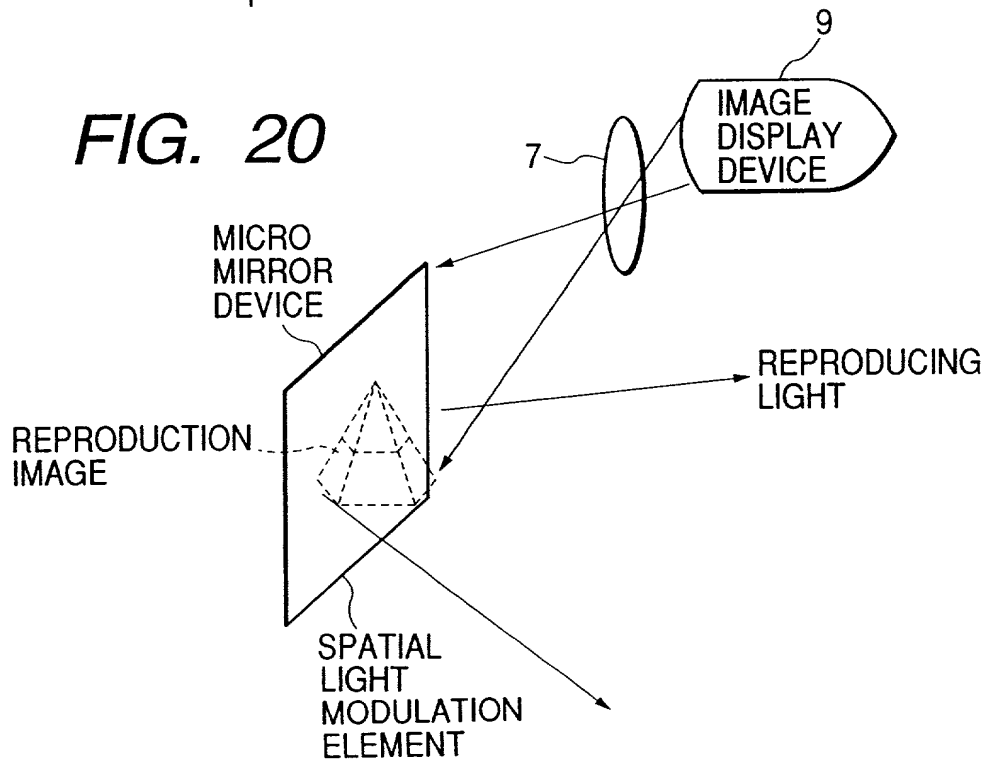
FIG. 18**FIG. 19****FIG. 20**

FIG. 22

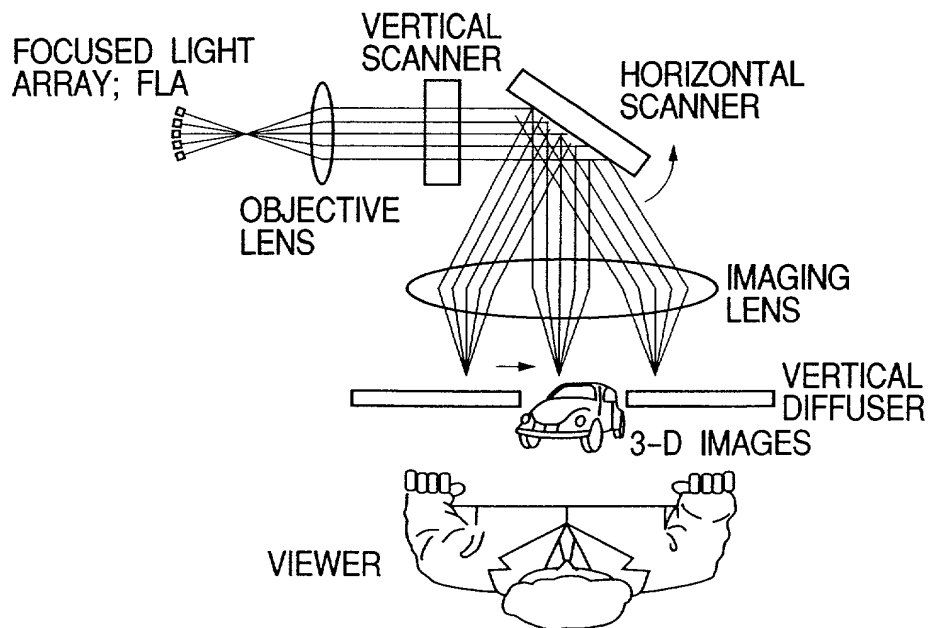


FIG. 23B

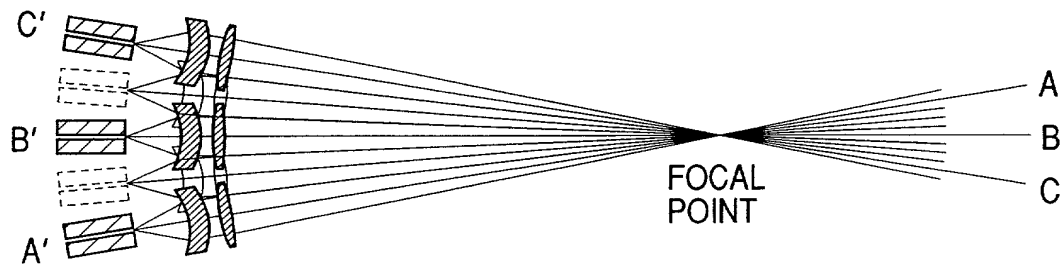


FIG. 24

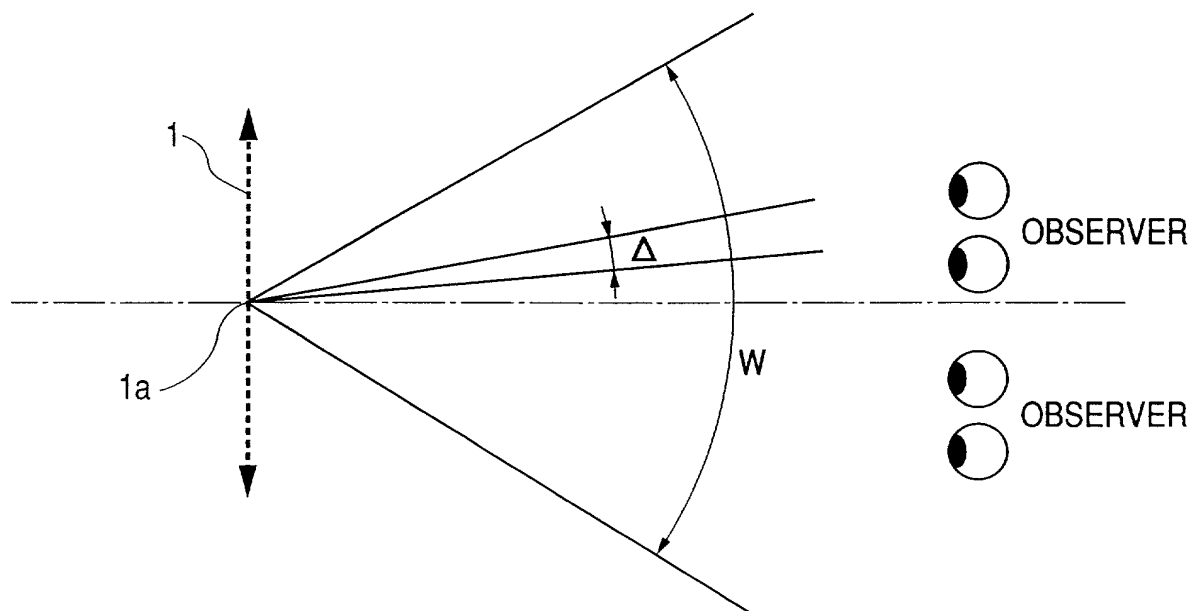


FIG. 29

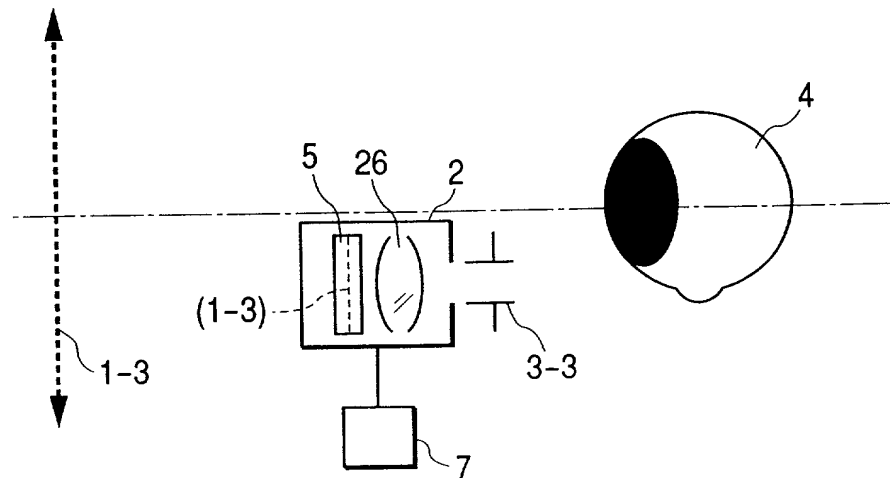


FIG. 30

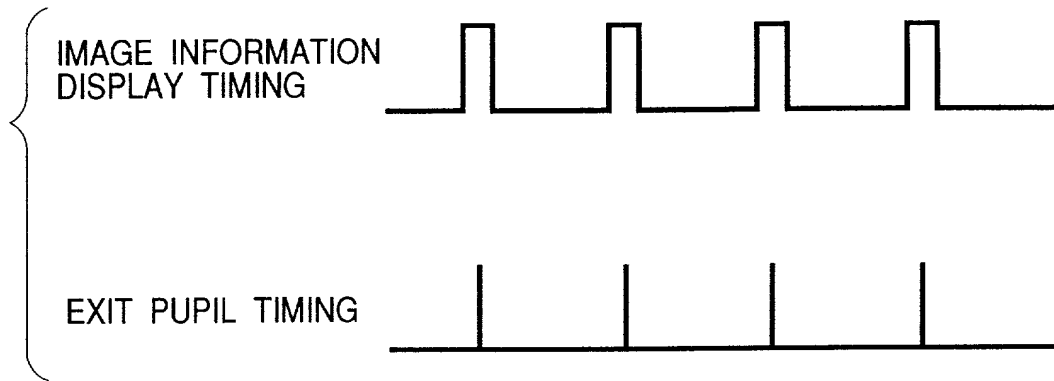


FIG. 31

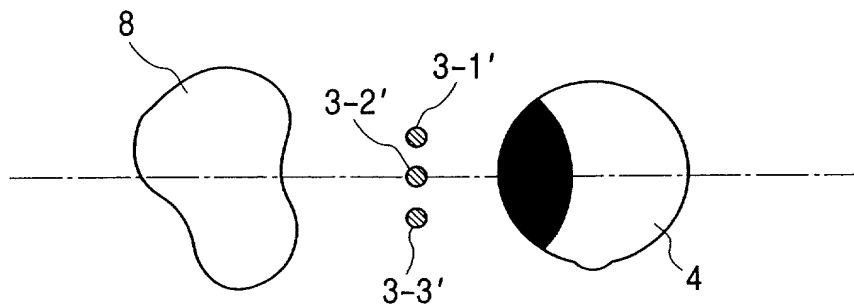


FIG. 32

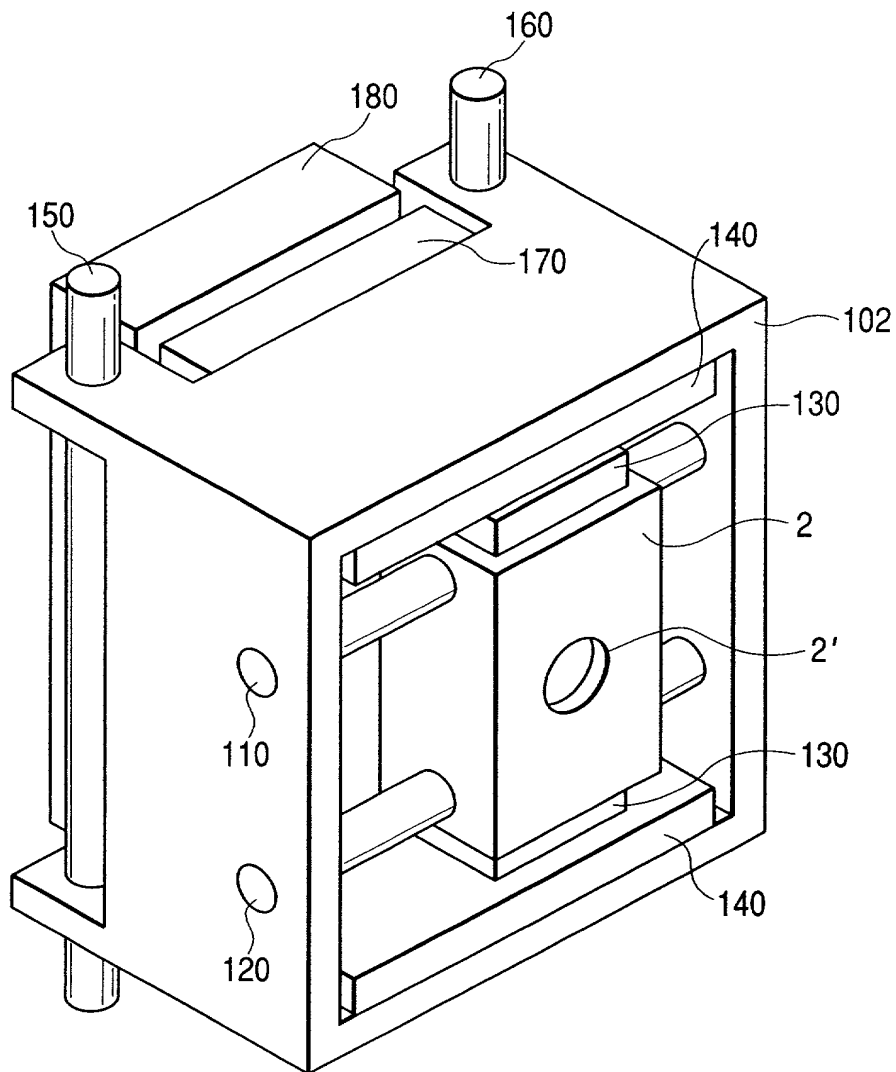


FIG. 34

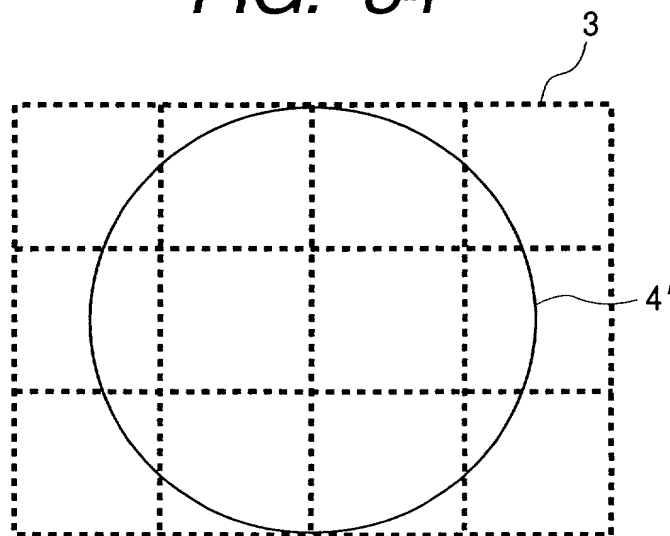


FIG. 35

3

4'

FIG. 37

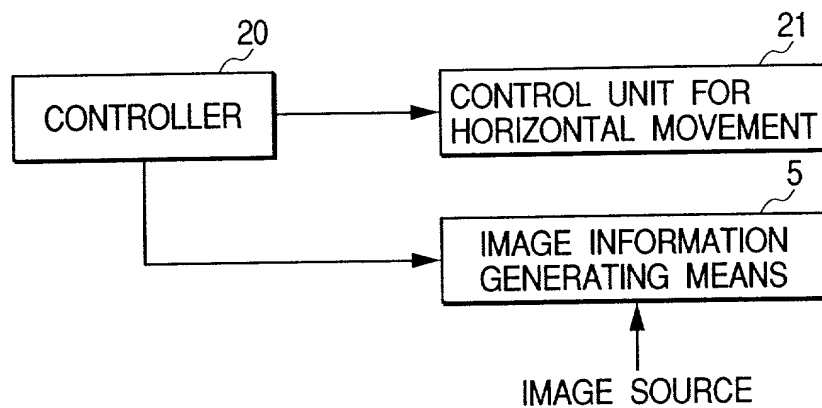


FIG. 38

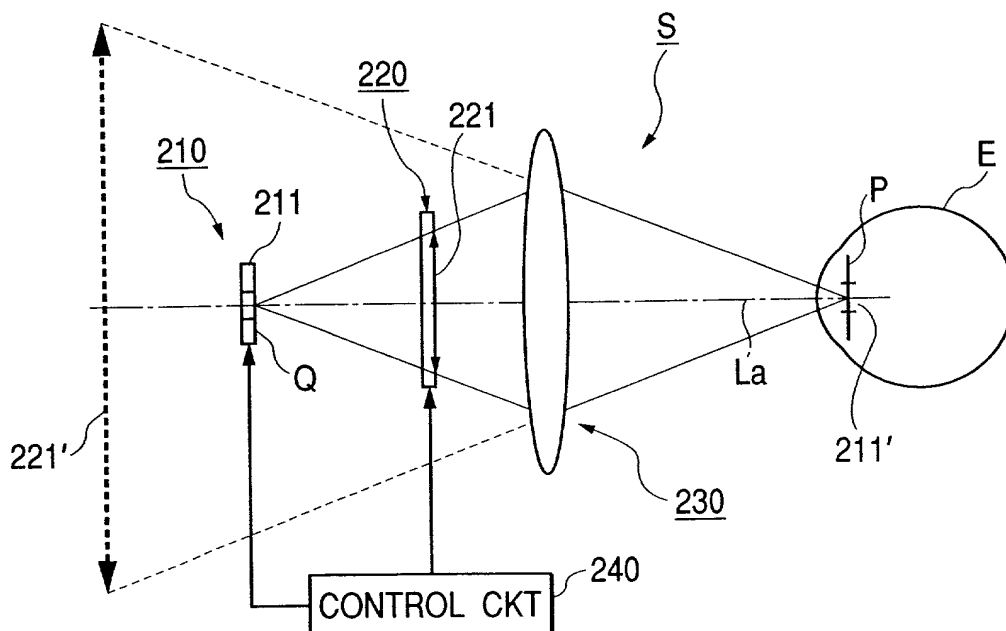


FIG. 39

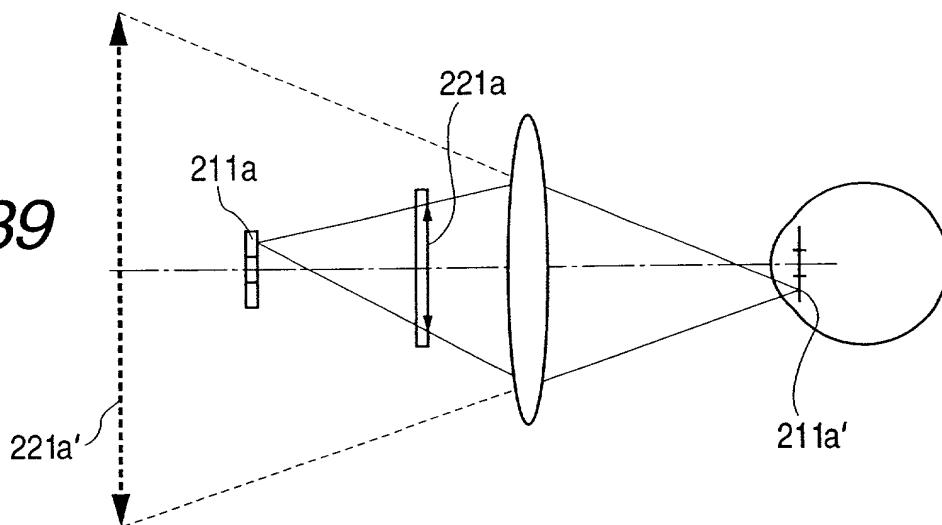


FIG. 40

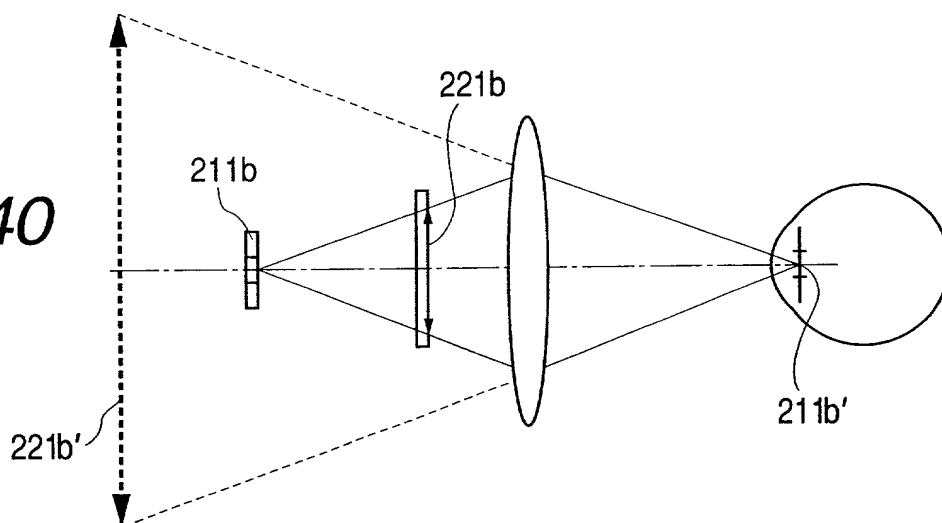


FIG. 41

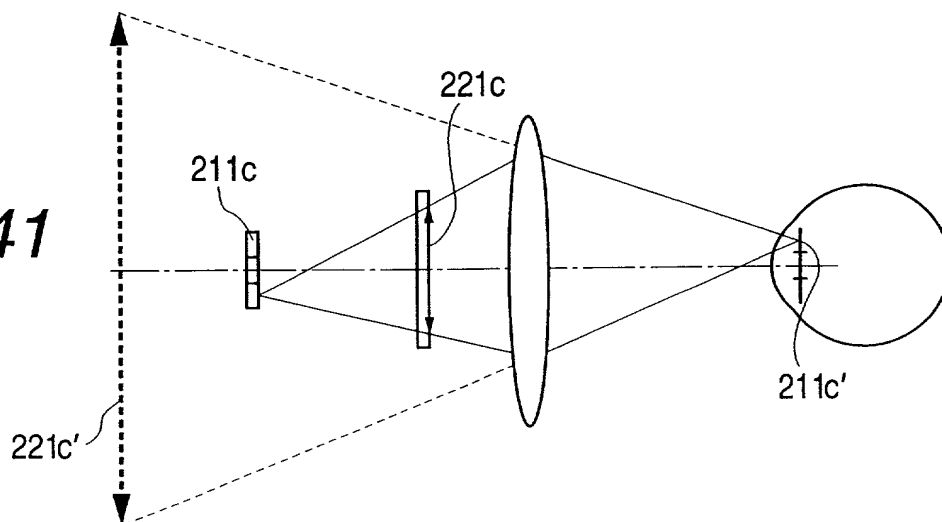


FIG. 42

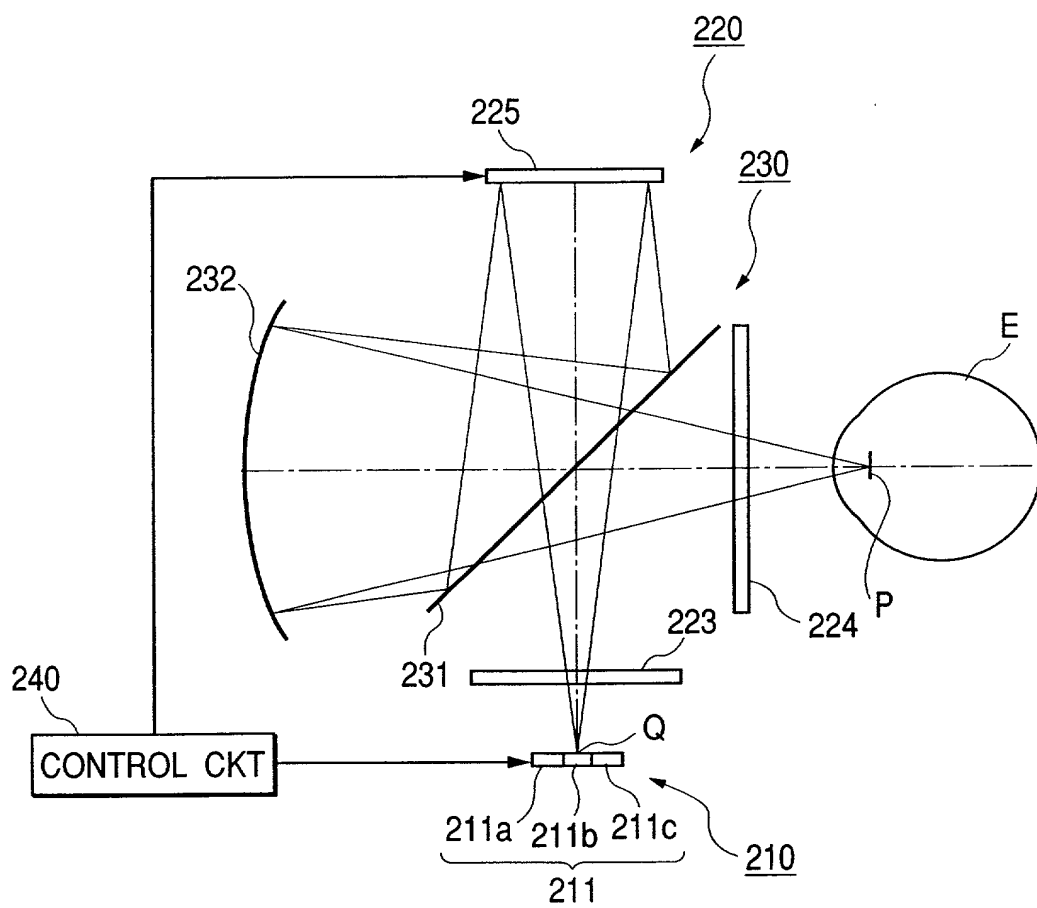


FIG. 43

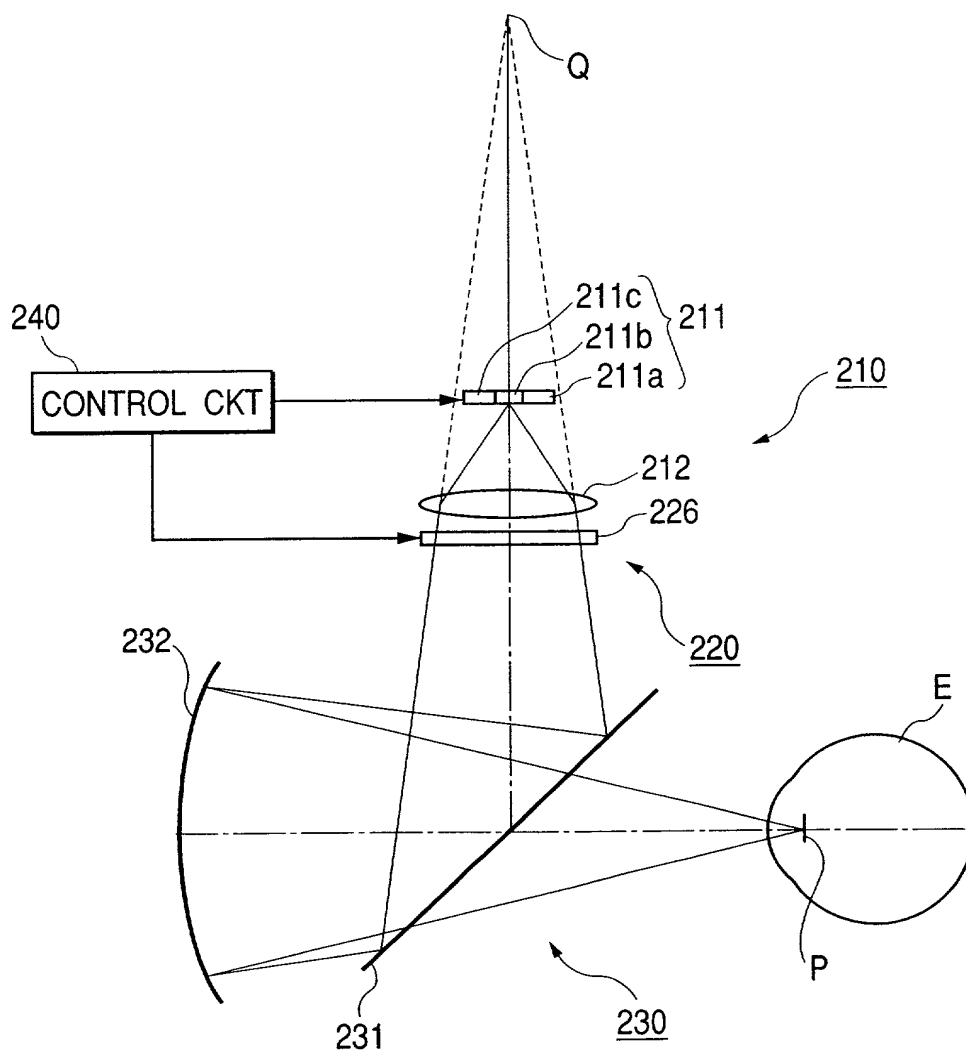


FIG. 44

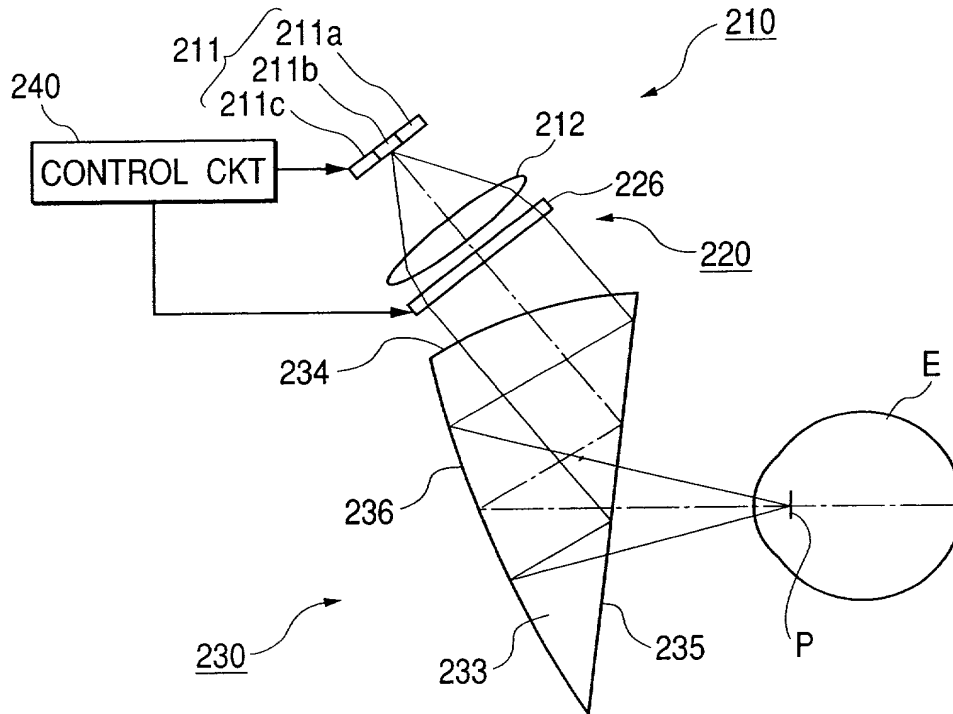


FIG. 45

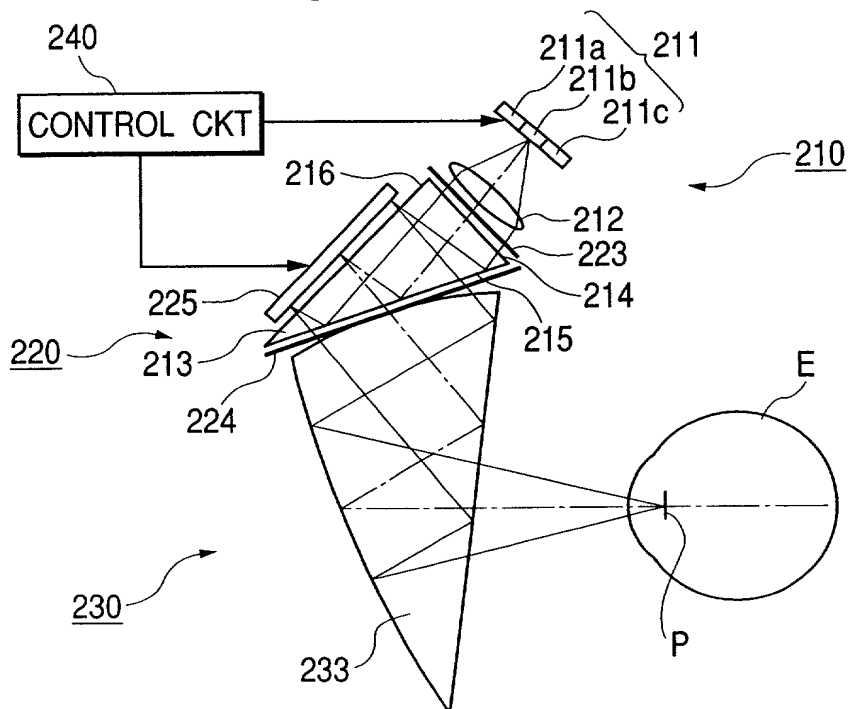


FIG. 46

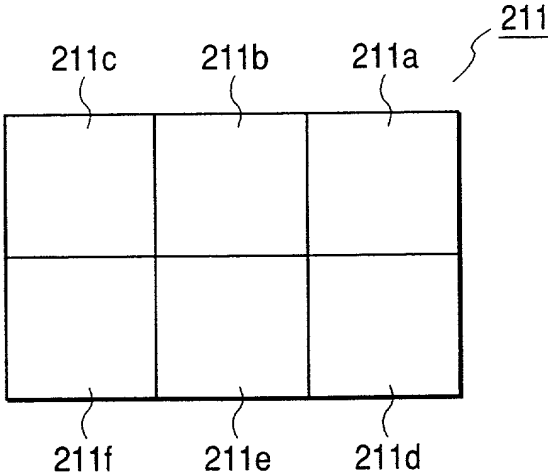


FIG. 47A

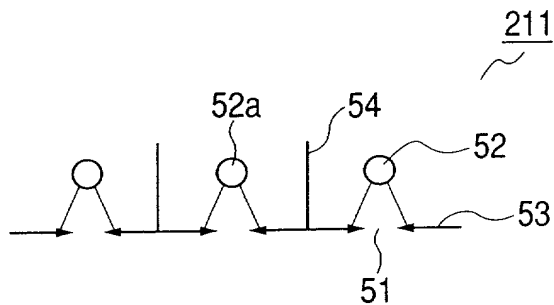


FIG. 47B

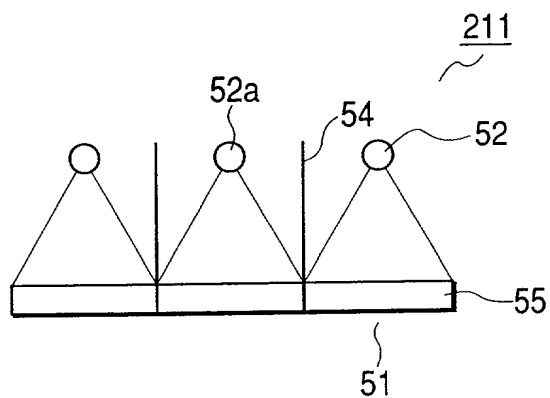


FIG. 47C

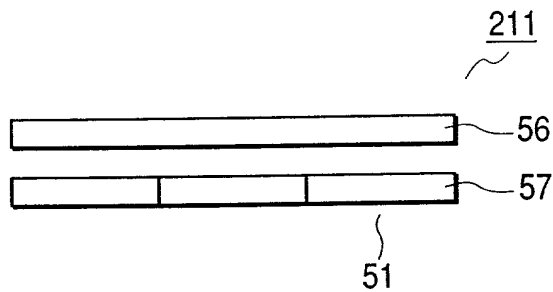


FIG. 47D

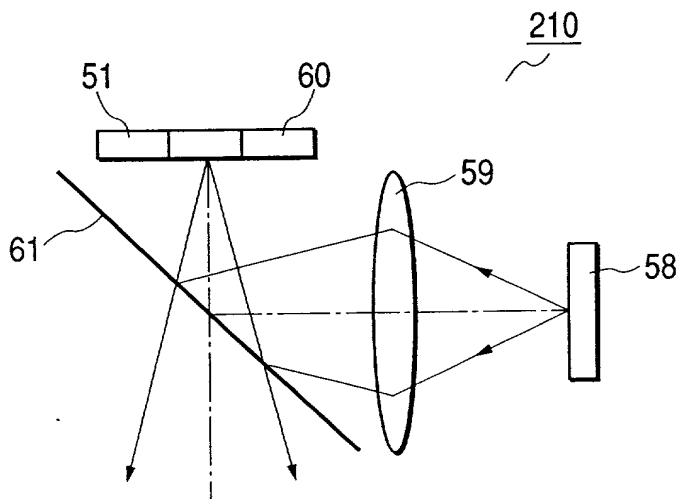


FIG. 48

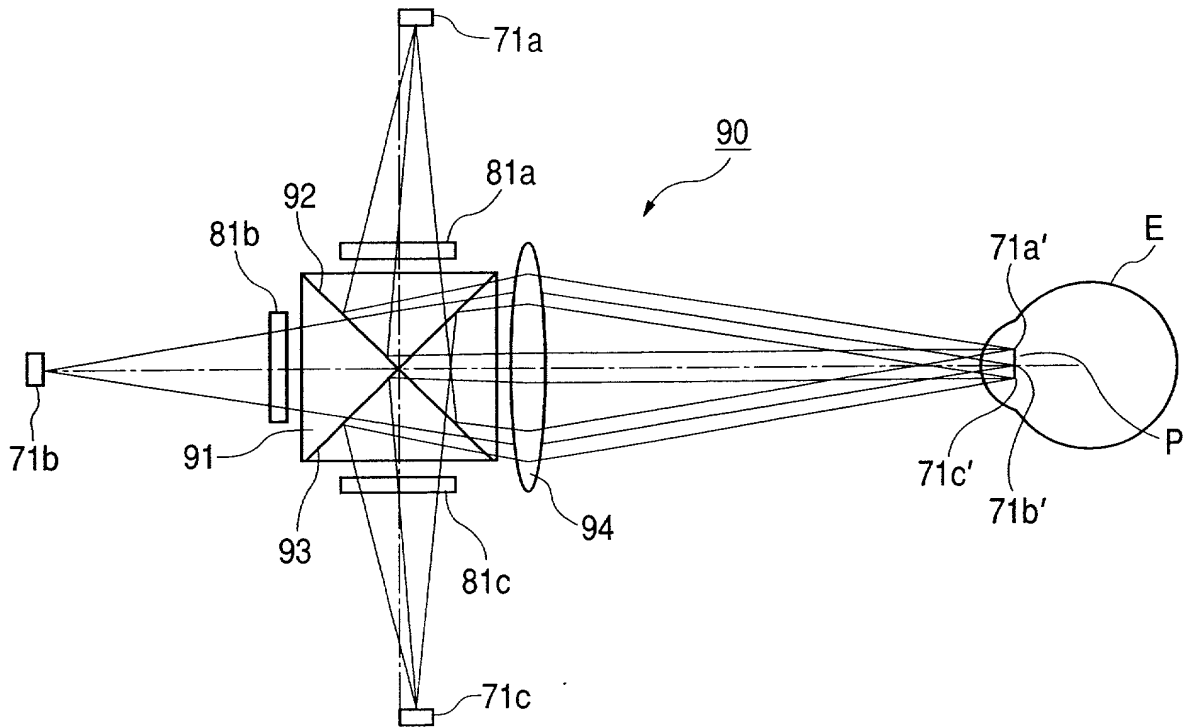


FIG. 49

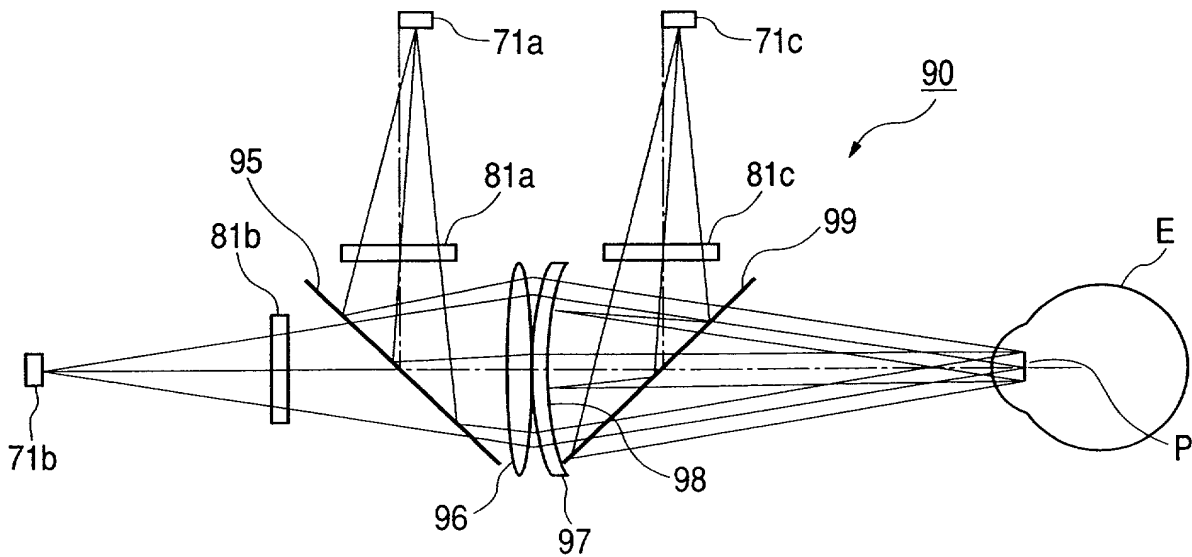


FIG. 50

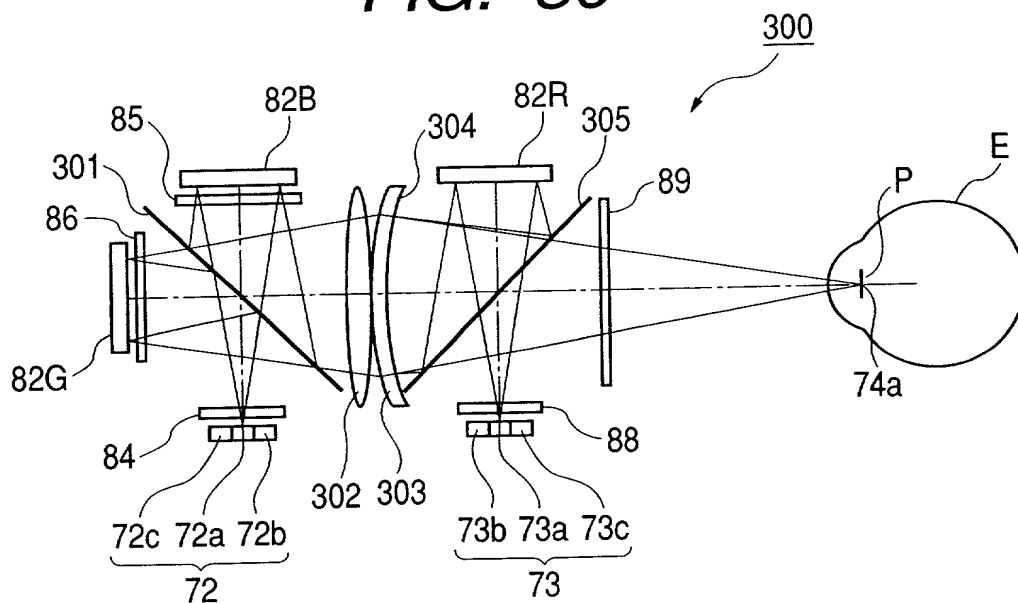


FIG. 51

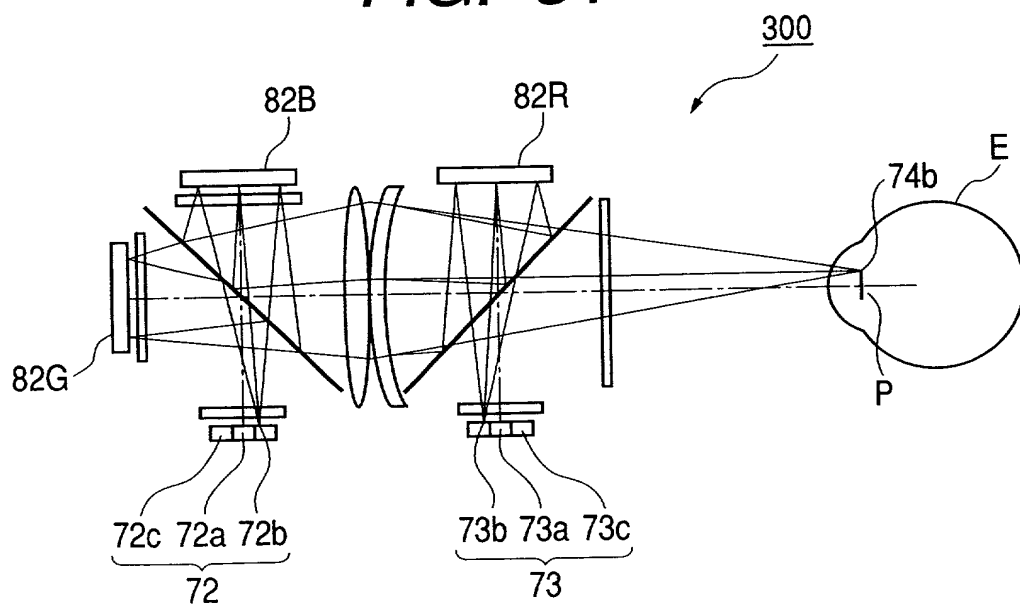
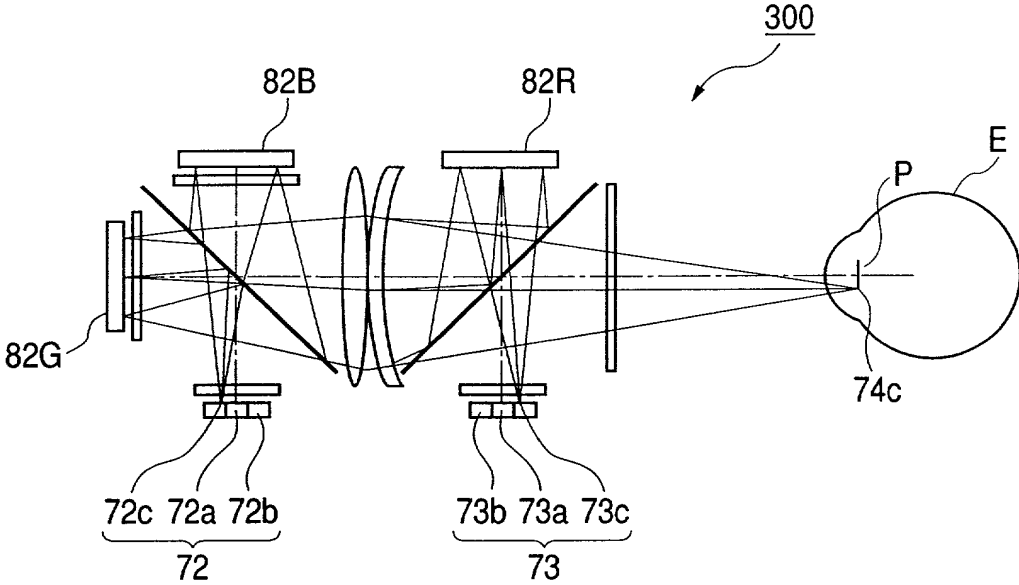


FIG. 52



JOINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 1)

MRP 12202 JS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMAGE INPUT APPARATUS AND IMAGE DISPLAY APPARATUS

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	11-253340	7 September 1999	YES
JAPAN	2000-3264	12 January 2000	YES
JAPAN	2000-28853	7 February 2000	YES

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor TOSHIYUKI SUDO

Inventor's signature Toshiyuki Sudo

Date August 21, 2000 Citizen/Subject of JAPAN

Residence 535-202, Kizuki, Nakahara-ku, Kawasaki-shi,
Kanagawa-ken, Japan

Post Office Address c/o Mixed Reality Systems Laboratory Inc.
145, Hanasaki-cho 6-chome, Nishi-ku, Yokohama-shi,
Kanagawa-ken, Japan

Full Name of Second Joint Inventor, if any AKINARI TAKAGI

Second Inventor's signature Akinari Takagi

Date August 21, 2000 Citizen/Subject of JAPAN

Residence 20-11, Hairando 3-chome, Yokosuka-shi,
Kanagawa-ken, Japan

Post Office Address c/o Mixed Reality Systems Laboratory Inc.
145, Hanasaki-cho 6-chome, Nishi-ku, Yokohama-shi,
Kanagawa-ken, Japan

003230" 39234560

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 2)

MRZ 12202 US

Full Name of Third Joint Inventor, if any TSUTOMU OSAKA

Third Inventor's signature *Tsutomu Osaka*

Date August 22, 2000 Citizen/Subject of JAPAN

Residence 2002-1-104, Futoo-cho, Kohoku-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o Mixed Reality Systems Laboratory Inc.
145, Hanasaki-cho 6-chome, Nishi-ku, Yokohama-shi,
Kanagawa-ken, Japan

Full Name of Fourth Joint Inventor, if any _____

Fourth Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

Full Name of Fifth Joint Inventor, if any _____

Fifth Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

Full Name of Sixth Joint Inventor, if any _____

Sixth Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

Full Name of Seventh Joint Inventor, if any _____

Seventh Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

Full Name of Eighth Joint Inventor, if any _____

Eighth Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

003230" 29/8/96